




REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2019/11/23	

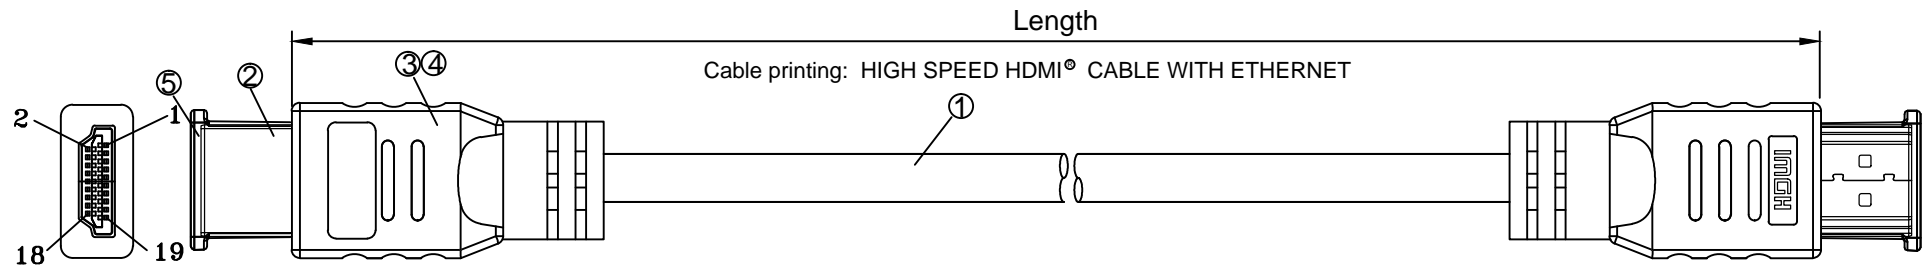

Cable Spec.

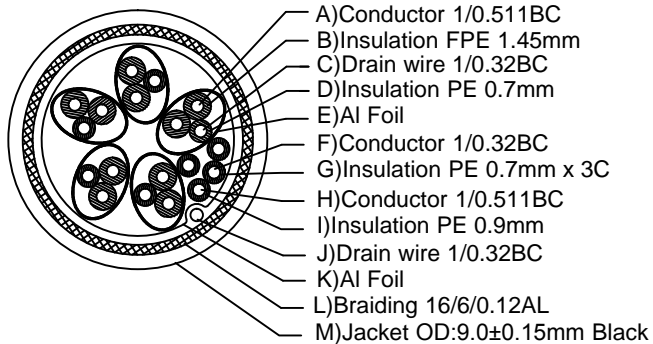

Signal Assignment

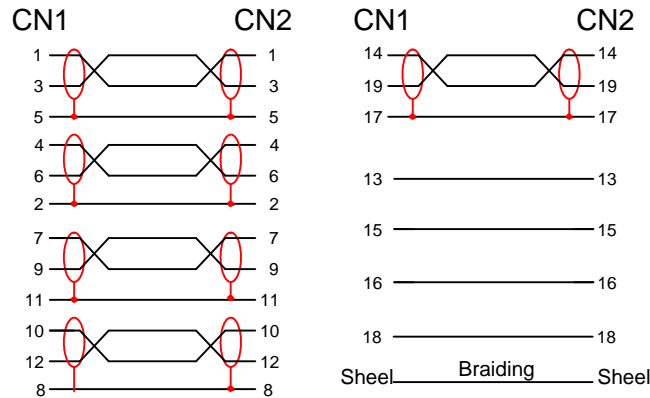


Remark:

- 1.100% Open/Short Test
2. Conductive Resistance: 15ohms MAX
3. Insulation Resistance: 5M ohm MIN.
4. HI-POT: DC 300V/10MS.
5. The product is Reach/RoHS 2.0 compliant.
6. Support 4K\*2K@60Hz

Item NO.	Length
K5431SW.20	20.0m

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑤	HDMI Protective Cap, PE	2PCS	
④	External Mold Outer Mould 45P PVC, Black	2PCS	
③	Inernal Mold Inner Mould PE	2PCS	
②	Connector HDMI A PLUG PIN, Gold-Plated	2PCS	
①	Cable 24+28+24AWG 2.0V (19+1BC) 96ALB HDMI Cable OD:9.0mm (0.511BC+FPE)*1P+D+AL ] *5C + (0.32BC+HDPE)*3C + (0.511BC+HDPE)*1C + AL + D + 96ALB PVCOD9.0mm		



ERP NO.:		SAMPLE DWG NO.:	
ZG No.:	ZG-1002	REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	HDMI 2.0V 19+1BC 24+28+24AWG	PAGE NO	1/1
		DATE	2019/11/23
APPROVAL		CHECKED	
		DRAWN	