



REVISIONS			
REV	DATE	DESCRIPTION	APPRO. BY

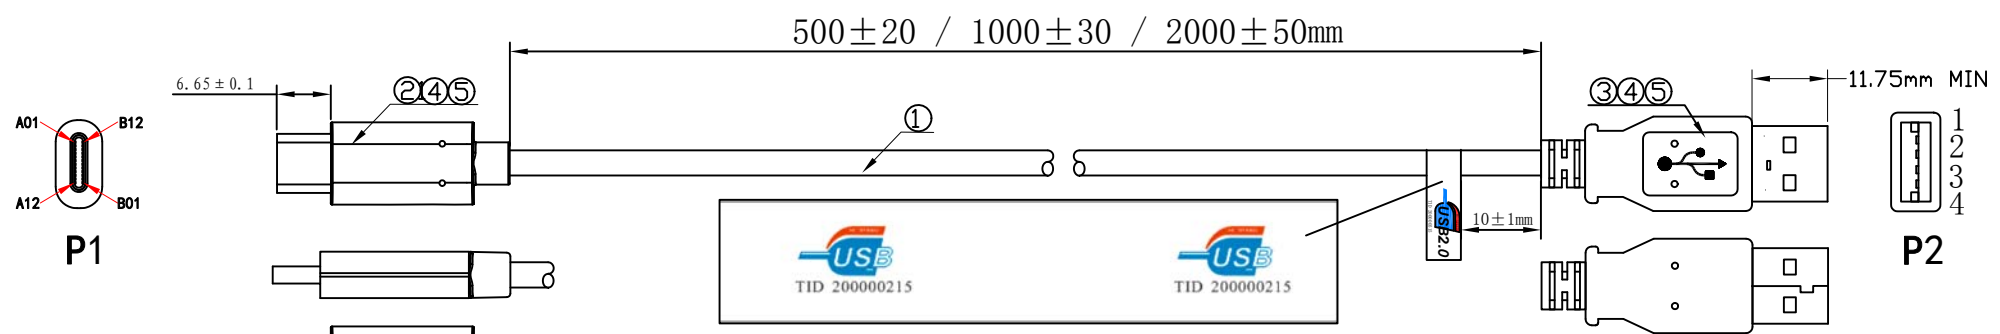

PIN ASSIGNMENT:

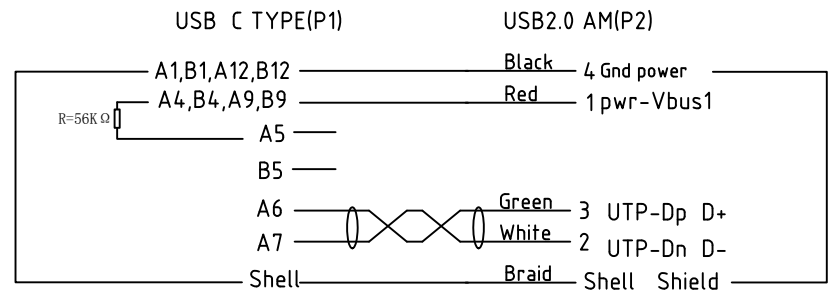

MATERIAL LIST:

⑤	OUTER MOLD	PVC 88A COLOR/BLACK	2
④	INNER MOLD	LD-PE NATURE IN COLOR	2
③	CONNECTOR 2	USB AM PIN Gold-Platde Fu", Shell Ni-Plated;	1
②	CONNECTOR 1	USB 3.1 C TYPE PIN Gold-Platde Fu", Shell Ni-Plated;	1
①	CABLE	USB 2.0 28AWG (7/0.127TC*1P)+22AWG (7/0.254TC*2C)+AEB B=0.10mm/7*16 TC JACKET:PVC/BLACK OD:3.7±0.2mm	1
NO.	MAT. NAME	SPECIFICATION STANDARD	QT' Y

NOTE:

- Electrical test:
 - 100% open short & miss wire test;
 - Insulation resistance: DC 200V 10 MΩ MIN;
 - Contact resistance: 3Ω MAX;
- RoHS Compliant
- PRINT WORD: AWM 80°C 30V VW-1 28AWGx1P 22AWGx2C
USB2.0 HIGHSPEED CABLE
- Electrical: 3A MAX
- The Speed For USB2.0 Compliant

CUSTOMER'S ITEM	K5258SW.X	CUSTOMER	EFB	
DRAWING		TITLE	USB 2.0 C/M - A/M	
UNIT	mm	SCALE	REV	A/O
DRAWN BY	CHECK BY	APPRO BY	DATE	
Zhouqinghua			2019/12/03	