



WAP-8121 Version: 1

AC750 Dual Band PoE Wireless Access Point, Deckenhalterung, Controller Managed

"The LevelOne WAP-8121 is a sophisticated, fast dual-band managed wireless access point, offering up to 450 Mbps on the 5 GHz band and up to 300 Mbps on the 2.4 GHz band. It provides a combined throughput of 750 Mbps using 802.11ac standards. The advanced wireless access point also supports all legacy wireless devices on 802.11a/b/g/n. WAP-8121 performs automatic testing and assigns channels dynamically to detect conflicts and channel interference, constantly optimising performance in the background. The device runs on PoE, negating the need for electrical wiring. Central management allows for adjustments to the RF (Radio Frequency) (according to)the environment, further optimising the performance of the network by adjusting and balancing workloads as well as detecting areas of weak reception. it provides WEP, WPA-PSK, WPA-TKIP, and WPA2 AES secured connectivity for securing the Wireless Area Network and to prevent unauthorized access. The device supports up to four(Eight) SSIDs allowing unique configuration settings for different network regions. The sophisticated and stylish access point mounts on a ceiling, providing a low-profile, highly effective networking solution."



Key-features

- Kompatibel zu den Standards von IEEE-802.11a/b/g/n/ac
- Multi-Betriebsmodi für unterschiedliche Drahtlosanwendungen
- IEEE-802.3af PoE kompatibel zur einfachen Verwendung und Installation
- Verfügt über bis zu 8 SSIDs um Netzwerkverkehr zu trennen und zur Verbesserung der Sicherheit
- Automatische Kanalwahl für störungsfreie Übertragung



Specifications

System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet
IEEE 802.3u 100-BASE-TX, Fast Ethernet
IEEE 802.11e Wi-Fi Multimedia (WMM)
IEEE 802.3x Ethernet Flow Control
IEEE 802.11i Wi-Fi Protected Access (WPA2)
IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n, IEEE 802.11AC Wireless Networking
IEEE 802.3 af Power over Ethernet

Connectors and Cabling:

1x 10/100Mbps Base-TX PoE Port
1x 10/100Mbps Base-TX Port

Taster:

Reset button

Indikator:

Power
WiFi

Power Input:

Power over Ethernet (IEEE802.3af) 48 VDC
Power supply DC12V / 1.5A"

Wireless

Operating Mode:

Wireless AP/Gateway/WiFi Repeater/WISP

Encryption:

WEP 64/128/152-bit Web share key encryption
WPA, WPA2 128-bit TKIP/AES encryption
WPA, WPA2-PSK TKIP/AES encryption

Receive Sensitivity(dBm):

2.4GHz:

802.11n (20MHZ): Range (-70) dBm
802.11n (40MHZ): Range (-68) dBm
802.11g: Range (-72) dBm
802.11b: Range (-95) dBm

5GHz:

802.11ac (80MHZ): Range (-62) dBm
802.11ac (40MHZ): Range (-65) dBm
802.11ac (20MHZ): Range (-68) dBm
802.11n (40MHZ): Range (-68) dBm
802.11n (20MHZ): Range (-70) dBm
802.11a: Range (-72) dBm

Channel:

Ch.1 ~ 11 USA
Ch.1 ~ 13 EU
Ch.36~165 Country

EIRP(dBm):

(Controllable for different country regulations)

5GHz:

802.11a 6Mbps: 23dBm
802.11a 54Mbps: 22dBm
802.11ac HT20: 20dBm
802.11ac HT40: 20dBm
802.11ac HT80: 18dBm
802.11n HT20: 20dBm
802.11n HT40: 20dBm

2.4GHz:
802.11b 1Mbps: 26dBm
802.11g 54Mbps: 23dBm
802.11n HT20: 23dBm
802.11n HT40: 22dBm

Antenna:

3x 3dBi(3*5dBi) inside Omni Antenna

Frequenz:

2.4 ~ 2.4835 GHz
5.15 ~ 5.35 GHz
5.46 ~ 5.72 GHz
5.725~ 5.825 GHz

Modulation:

OFDM = BPSK,QPSK, 16-QAM, 64-QAM? DSSS = DBPSK, DQPSK, CCK

Data Transfer Rate:

802.11AC:433.3~130Mbps
802.11n: 300 ~ 78 Mbps
802.11g: 54 ~ 6 Mbps
802.11b: 11 ~ 1 Mbps
802.11a/g:54~6Mbps

Features

General:

2.4GHz: Multi-SSID: 4 SSIDs 5GHz: Multi-SSID: 4 SSIDs

PoE:

IEEE 802.3af

Security:

SSID Broadcast On/Off

Management:

Web-Based GUI Configuration

QoS:

802.11e WMM Supported

Ease of Use:

Web-based GUI with Quick Installation Wizard
Web-based (HTTP) firmware upgrade

Performance

Number of Clients:

Maximum:80
Recommend:64

Environment

Temperatur (°C):

Operating: -20°C ~ 50°C
Storage: -40°C ~ 70°C

Luftfeuchtigkeit (nicht kondensierend):

Storage: 5 ~ 90%
Operating: 10 ~ 90%

Physical Specifications



Abmessungen (W x D x H mm):

189*189*38.5mm

Gewicht:


326

Approval and Compliance

Zertifizierung:

CE/FCC

Diagramm

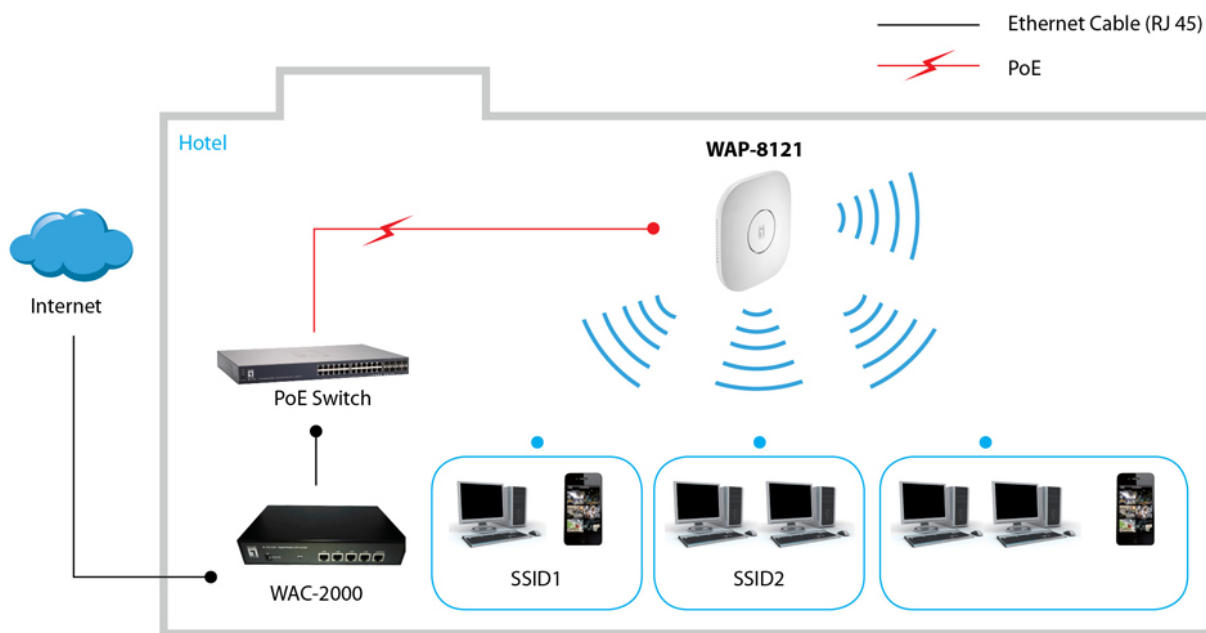

Order Information

WAP-8121

Package Contents

WAP-8121

RJ45-Ethernet-Kabel

Quick Installation Guide

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.