


REVISTONS

| REV | DATE | DESCRIPTIONS | APPRO.BY |
|-----|------|--------------|----------|
| | | | |

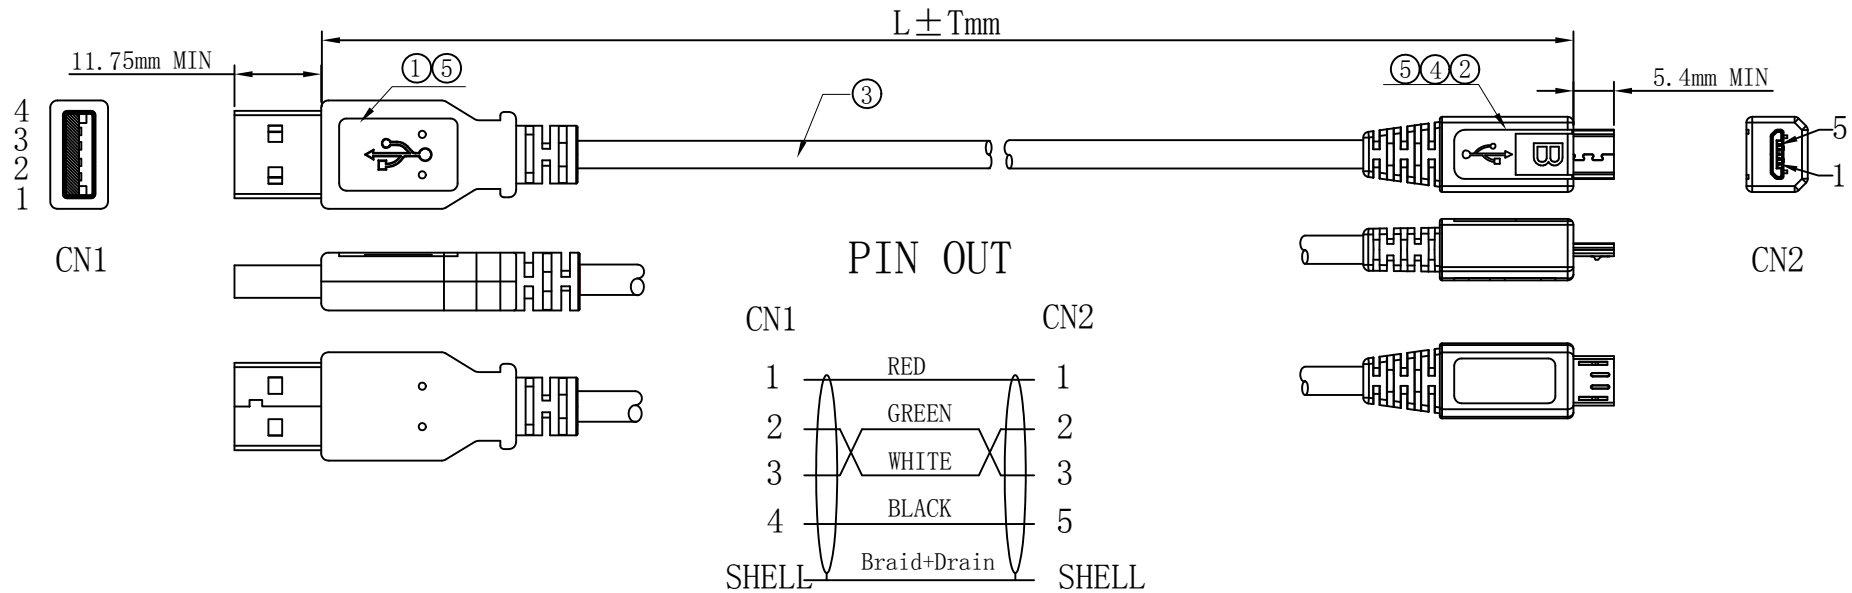

NOTE:

1. PRINTING: AWM 80°C 30V VW-1 28AWG×1P
28AWG×2C USB2.0 HIGHSPEED CABLE

2. RoHS COMPLIANT

| ITEM NO. | LENGTH |
|----------------|-------------|
| K5228SW. 0.5V2 | 500 ± 10mm |
| K5228SW. 1V2 | 1000 ± 20mm |
| K5228SW. 1.8V2 | 1800 ± 20mm |
| K5228SW. 3V2 | 3000 ± 30mm |

| NO. | MAT.NANE | DESCRIPTION | Q'TY |
|-----|------------|--|------|
| ⑤ | OUTER MOLD | PVC BLACK 88A | 2 |
| ④ | INNER MOLD | LD-PE | 1 |
| ③ | CABLE | USB 2.0 High Speed Cable 28AWG*1P+28AWG*2C+AL+E+B B(coverage rate 65%) JACKET:PVC/BLACK OD:4.0±0.2mm AL=Aluminium Foil E=Drain Wire AWG28/7 bare copper B=Braid Shield | 1 |
| ② | CONNECTOR | USB MICRO BM TYPE, PIN GOLD PLATED 30u"; SHELL NICKEL-PLATED | 1 |
| ① | CONNECTOR | USB AM TYPE, PIN GOLD PLATED 30u"; SHELL NICKEL-PLATED | 1 |
| NO. | MAT.NANE | DESCRIPTION | Q'TY |

| CUSTOMER'S ITEM | K5228SW. XV2 | CUSTOMER | EFB | | | |
|-----------------|--------------|----------|------------|-----|--|-------|
| DRAWING | | | | | | TITLE |
| UNIT | mm | SCALE | 1:1 | REV | | |
| DRAWN BY | CHECK BY | APPRO BY | DATE | | | |
| Zhouqinghua | | | 2020.08.28 | | | |