

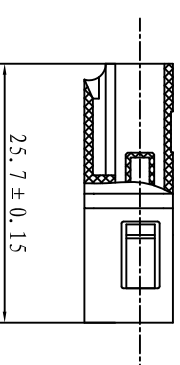


# Multimode OM3 LC/LC Duplex adapter(SC simplex footprint),plastic housing aqua,ceramic sleeve,white dust cap

## Specification

Sleeve Material	Ceramic
Typical Insertion Loss,dB	0.1
Max Insertion Loss,dB	0.2
Durability(100 Mating)	0.2dB Max.Increase
Operating Temperature,°C	-40~+85
Storage Temperature,°C	-40~+85

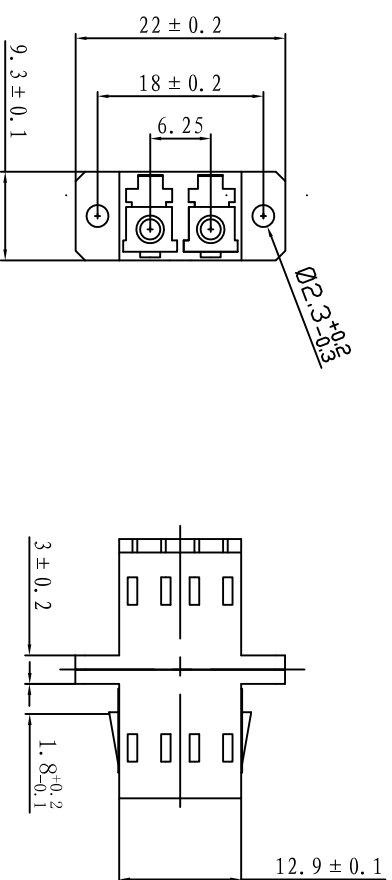

The performance of the adaptors has been carefully designed to meet

the toughest Telcordia standard

GR-326-CORE

RoHS compliant

LC adapter according to IEC 61754-20

in the test of:

- OPTICAL CHARACTERISTICS
- VIBRATION TEST
- THERMAL CYCLING
- IMPACT RESISTANCE
- SALT SPRAY EROSION
- THERMAL AGING
- HUMIDITY RESISTANCE
- OTHERS



**EFB**

Multimode OM3 LC/LC Duplex adapter(SC simplex footprint),plastic housing beige,ceramic sleeve,white dust cap

Part NO:

Drawing NO:

Page: 1 of 1