


P1:	M-942H
P2:	M-Y928C
	M-928C

Customer No: No.6

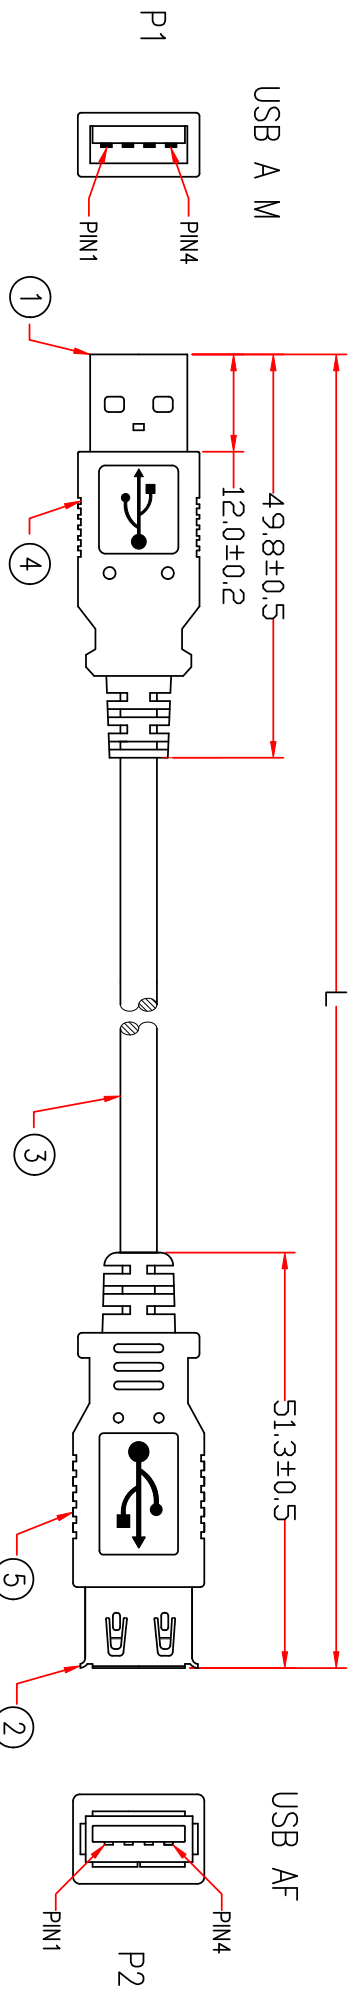

ITEM NO.	L(mm)	X(mm)
K5205.0,2	200mm	180mm
K5205.0,5	500mm	480mm
K5205.1	1000mm	980mm
K5205.1,8	1800mm	1780mm
K5205.3	3000mm	2980mm
K5205.5	5000mm	4980mm

9466-36	
P1	P2
1	1
2	2
3	3
4	4
SHIELD	SHIELD
	24#
	RED
	WHITE
	GREEN
	BLACK
	24#

NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	QTY	Supplier
1	USB A MALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE	1set	M454
2	USB A FEMALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR	1set	M432
3	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, AEB65% (OD 4.5mm, JACKET BLACK(LSZH), DRAWING No.EJAE2807P2402C-623	Xmm	M304
4	MOLDED PVC BLACK(LSZH)		M751
5	MOLDED PE COLOR TRANSPARENT		M280

PART NO.	9466-36	Revision:	
APPROVED		Cable Length	Unless Other Spec.
CHECKED	HU	Tolerances:	0 ~200mm
DRAWING	L1		201~1000mm
			1001 ~1500mm
			1501~2100mm
			2100mm↑
DATE	28/NOV/16	ITEM NO.	K5205.X
		UNIT:mm	



REV.2	2016.10.14	ADD LENGHT	REV.3	2016.11.28	ADD LENGHT
RE.1	2015.09.08	MODIFY DRAWING			CHECKED