


REV	DESCRIPTION	DATE	ECN NO.
	Production Release	2015.10.30	
⚠			

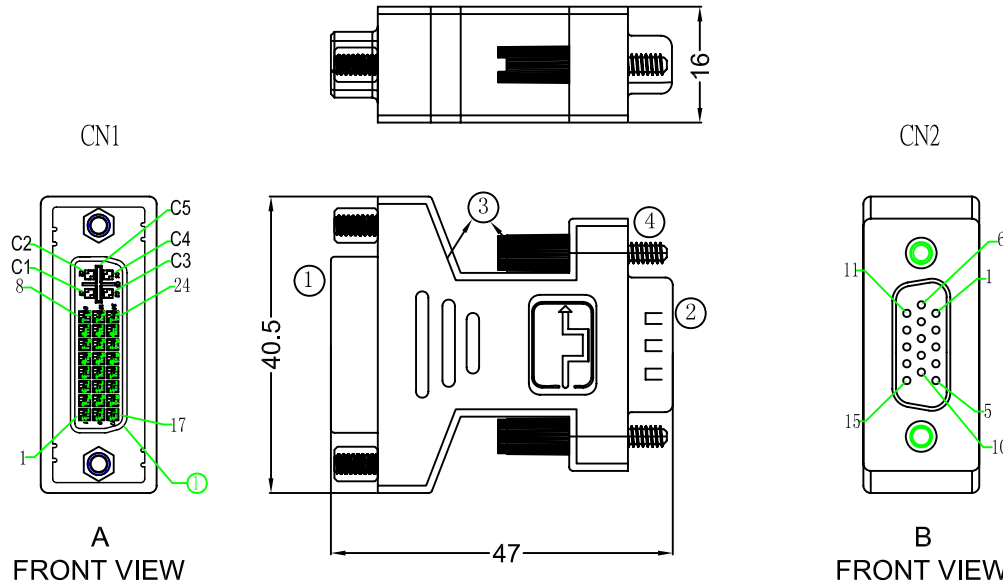

PIN ASSIGNMENT

DVI24+5P	HD15M
C1	1
C2	2
C3	3
15	5
C5	6
14	8
16	9
7	12
C4	13
8	14
6	15

ELECTRICAL TEST:

- 100% OPEN&SHORT TEST
- CONTACT RESISTANCE:"X" Ohm (MAX)
- INSULATION RESISTANCE:10 MOhm (MIN)
DC:250V

④	SCREW	SCREW 4-40#	2
③	MODEL	PVC MOLDING,COLOR:BLACK	
②	CONNECTOR	HD 15 PIN MALE CONNECTOR,CONTACT GOLD PLATED , SHELL:NICKEL PLATED INSULATOR COLOR:BLUE	1
①	CONNECTOR	DVI 24+5 FEMALE CONNECTOR,CONTACT GOLD PLATED , SHELL:NICKEL PLATED INSULATOR COLOR:BLACK	1
NO.	PART NAME	DESCRIPTION	QTY



DESCRIPTION		DVI24+5 F TO HD 15M			
ITEM NO.		EB462V2			
CUSTOMER		EFB	CUSTOMER P/N		
UNIT	mm	TOLERANCE: LINEAR: X. =±1 .X =±0.2 .XX=±0.05	ANGULAR: X.° =±1° .X° =±0°30'	DRAWN BY	
SCALE	NTS			CHECKED BY	
SHEET	1/2	FILLET: R2=RAD.2mm R5=RAD.5mm XR=MAX RAD.	CHAMFER: C0.5=CHAM0.5mm C1=CHAM1mm	APPD. BY	
		DATE	2015.10.30		