



REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2019/11/23	

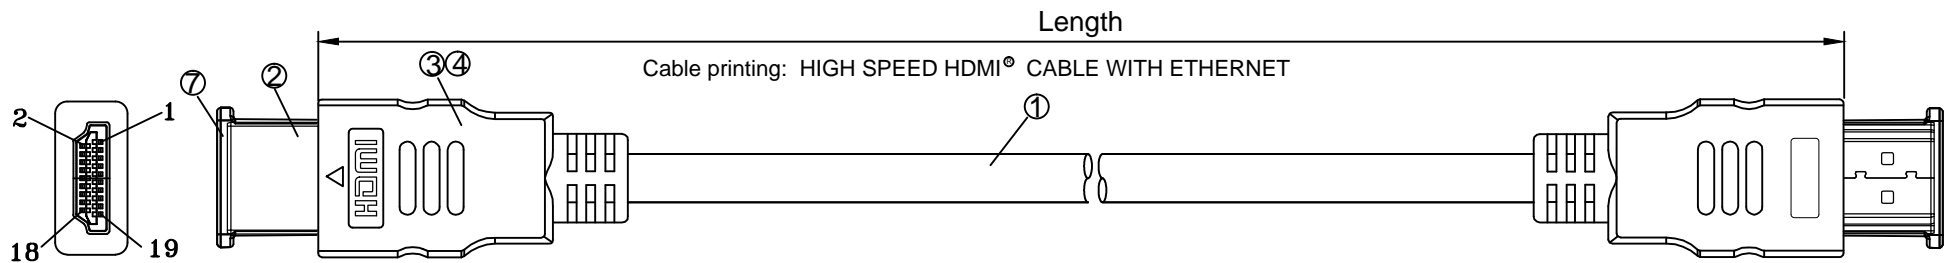


- Remark:
- 100% Open/Short Test
 - Conductive Resistance:15ohms MAX
 - Insulation Resistance:5M ohm MIN.
 - HI-POT:DC 300V/10MS.
 - The product is Reach/RoHS 2.0 compliant.
 - Support 4K*2K@60Hz

Signal Assignment

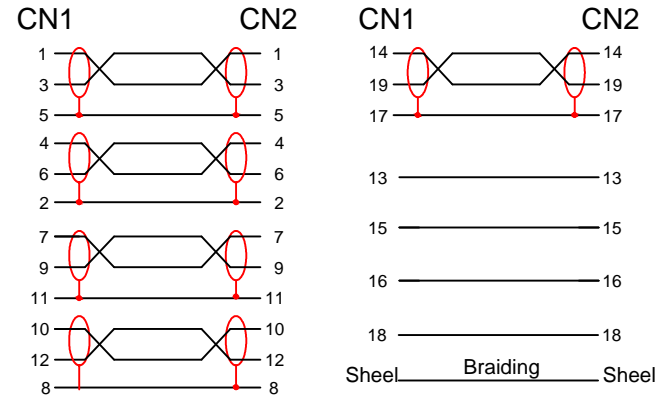


Item NO.	Length
K5431SW.0.5	0.5m
K5431SW.1	1.0m
K5431SW.2	2.0m
K5431SW.3	3.0m

Cable Spec.

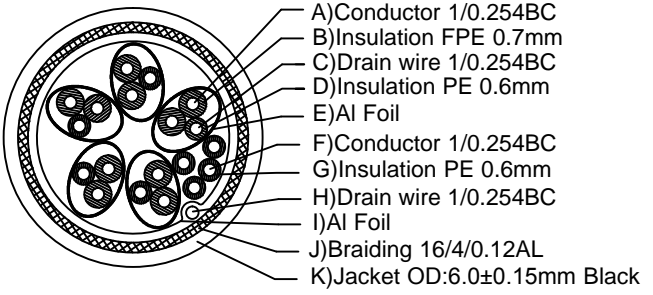

⑤		HDMI Protective Cap, PE	2PCS	
④	External Mold	Outer Mould 45P PVC, Black	2PCS	
③	Inernal Mold	Inner Mould PE	2PCS	
②	Connector	HDMI A PLUG PIN, Gold-Plated	2PCS	
①	Cable	30AWG 2.0V (19+1BC) 64ALB HDMI Cable OD:6.0mm (0.254BC+FPE)*1P+D+AL] *5C + (0.254BC+HDPE)*4C + AL + D + 64ALB PVCOD6.0mm		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	HDMI 2.0V 19+1BC	PAGE NO	1/1
		DATE	2019/11/23
APPROVAL	CHECKED	DRAWN	