

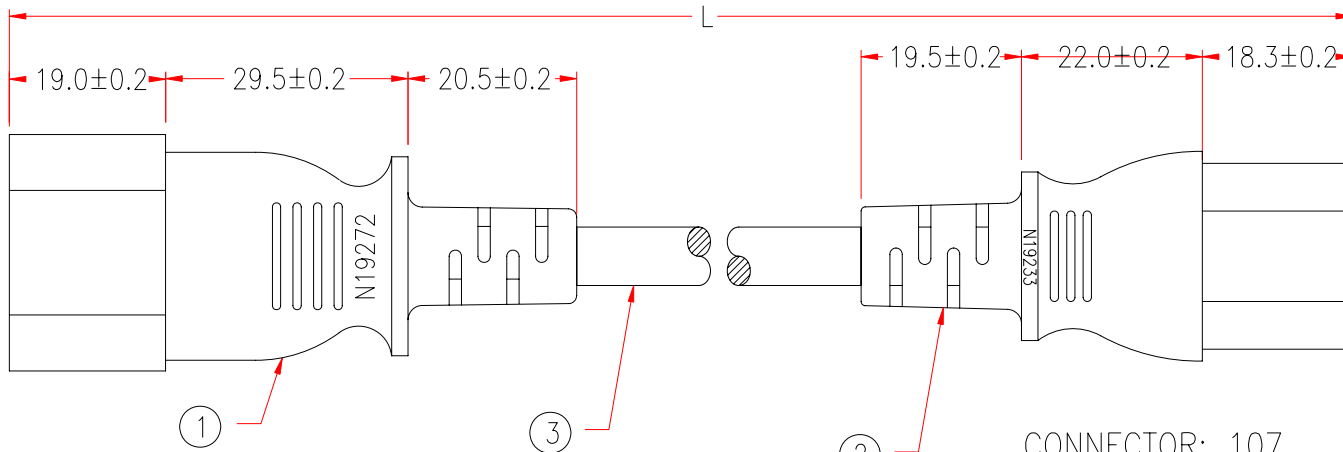


P1: M-004

P2: M-005

Customer No: No.6

P1





P2

PLUG: 106


CONNECTOR: 107

ITEM NO.	X(m)	L(mm)
EK503.0,5	0.5M	500mm
EK503.0,6	0.6M	600mm
EK503.1	1M	1000mm
EK503.2	2M	2000mm

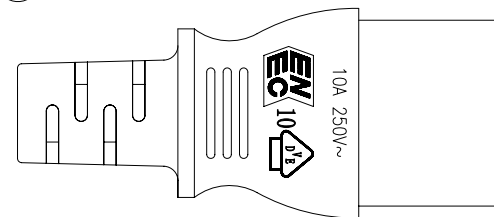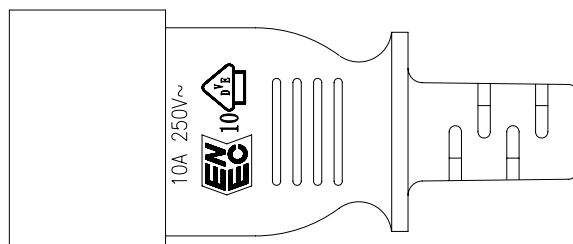

⚠️ ⚠️ P1,P2:

* NOTE: All relevant materials are complied with RoHS directive .

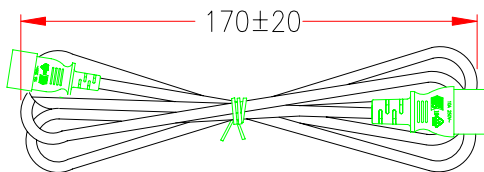

⚠️ CONCAVE LETTERING WORD CABLE:

H05W-F 3G 0.75mm² ⓓ Ⓢ Ⓝ ⓕ Ⓢ Ⓢ KEMA-KEUR IEMMEQU <VDE> Ⓢ

N20050 G TSA-3 3G 0.75mm² MSL ⚠️ ⚠️

P1		P2	
BROWN	L	L	BROWN
BLUE	N	N	BLUE
GREEN/YELLOW	E	E	GREEN/YELLOW

No.	DESCRIPTION	Q'TY	Supplier
3	H05 W-F 3G 0.75mm ² , G TSA-3, OD6.8mm, JACKET BLACK, DRAWING No. EPH5V0107503C-102	H5TH21-0304K09	M304
	MOLDED PVC 45P, COLOR BLACK	H1BF01-0304K09	M304
2	BRACKET: CP-R445A-BS	A1QC61-0767	M767
	TERMINAL: 2x4mm 98744BS-0/A	A1QB24-0257	M257
1	MOLDED PVC 45P, COLOR BLACK	H1BF01-0304K09	M304
	BRACKET: YS-014	A1QC10-0767	M767
	TERMINAL: 2x4mm, 98672BS-1	A1QB07-0257	M257

PART NO.106107E3FS2B(FP057-02)		Revision:		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
APPROVED				
CHECKED	HU			
DRAWING	LAI			
DATE	09/AUG/17	ITEM NO.	EK503.X	UNIT:mm

⚠️ REV.6 2017.08.09	MODIFY CABLE DRAWING NO.EPH5V0107503C-102 FROM EPH5V0107503C-027		
⚠️ REV.5 2017.07.22	MODIFY P2 PLUG MODEL LOGO,CONCAVE LETTERING WORD CABLE.		
⚠️ REV.4 2013.03.11	MODIFY CABLE MARKING CONTENT AND TAKE OF ITEM NO. EK503.0,7		
⚠️ REV.2 2012.07.03	MODIFY P1 MODEL WORD	⚠️ REV.3 2012.09.05	ADD ITEM NO. EK503.0,7
⚠️ REV.1 2011.03.09	MODIFY P2 MODEL WORD	CHECKED	