
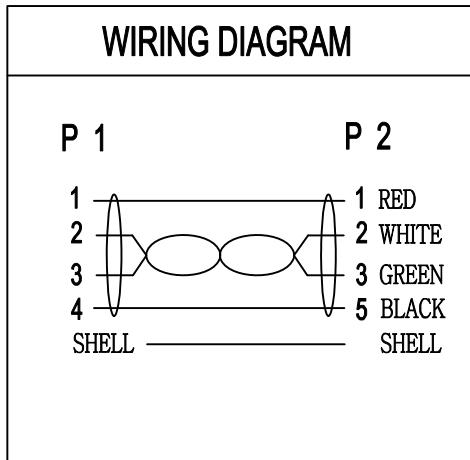


REVISION			
REV	DATE	DESCRIPTION	APPRO.BY

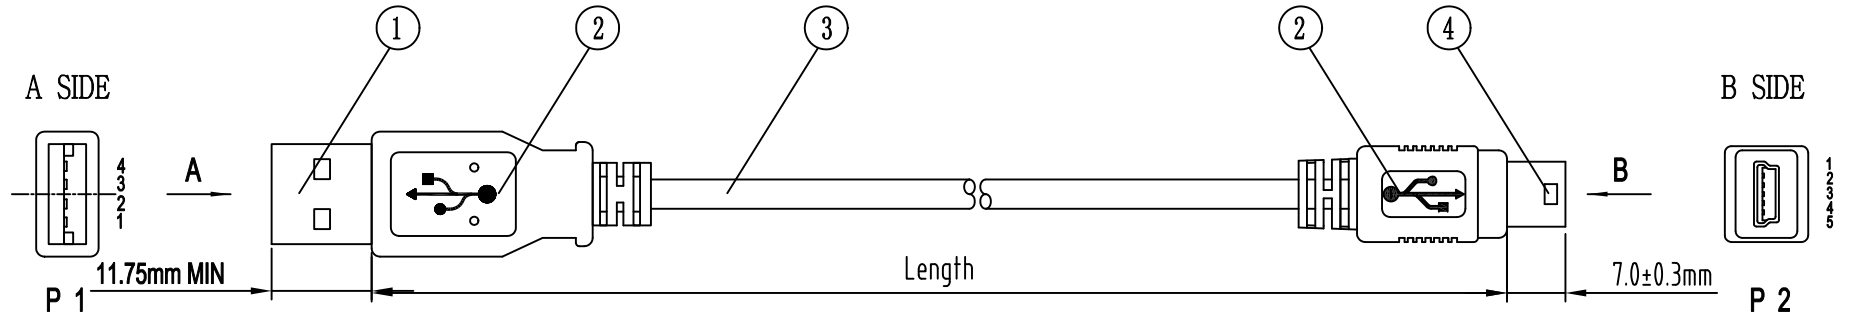

BLACK	
EFB NO:	Length
K5250SW.0,5V2	500±10mm
K5250SW.1V2	1000±20mm
K5250SW.1,5V2	1500±30mm
K5250SW.1,8V2	1800±30mm
K5250SW.3V2	3000±50mm

NOTE:

1.PRINTING:

AWM 80°C 30V VW-1 28AWG×1P 28AWG×2C
USB2.0 HIGHSPEED CABLE

2.RoHS COMPLIANT

④	CONNECTOR	MINI USB 5Pin B TYPE MALE NICKEL PLATED SHELL 1u" GOLD PLATED PIN,WHITE INSULATOR	1
③	CABLE	28AWG TXR*1P+28AWG TXR*2C+AL+B(COVERAGE RATE IN 65%) USB2.0 HIGHSPEED CABLE JACKET PVC BLACK OD=4.5±0.2mm	1
②	OVERMOLD	PVC COLOR:BLACK	2
①	CONNECTOR	USB A TYPE MALE NICKEL SHELL 1u" GOLD PLATED PIN,WHITE INSULATOR	1
NO.	MAT.NAME	DESCRIPTION	Q'TY

CUSTOMER'S ITEM		K5250SW.XV2		CUSTOMER		EFB		
DRAWING				TITLE		USB CABLE		
UNIT	mm	SCALE	1:1	REV	A/0			
DRAWN BY		CHECK BY		APPRO BY		DATE		
Zhouqinghua						2020-09-01		