


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2019/11/23	

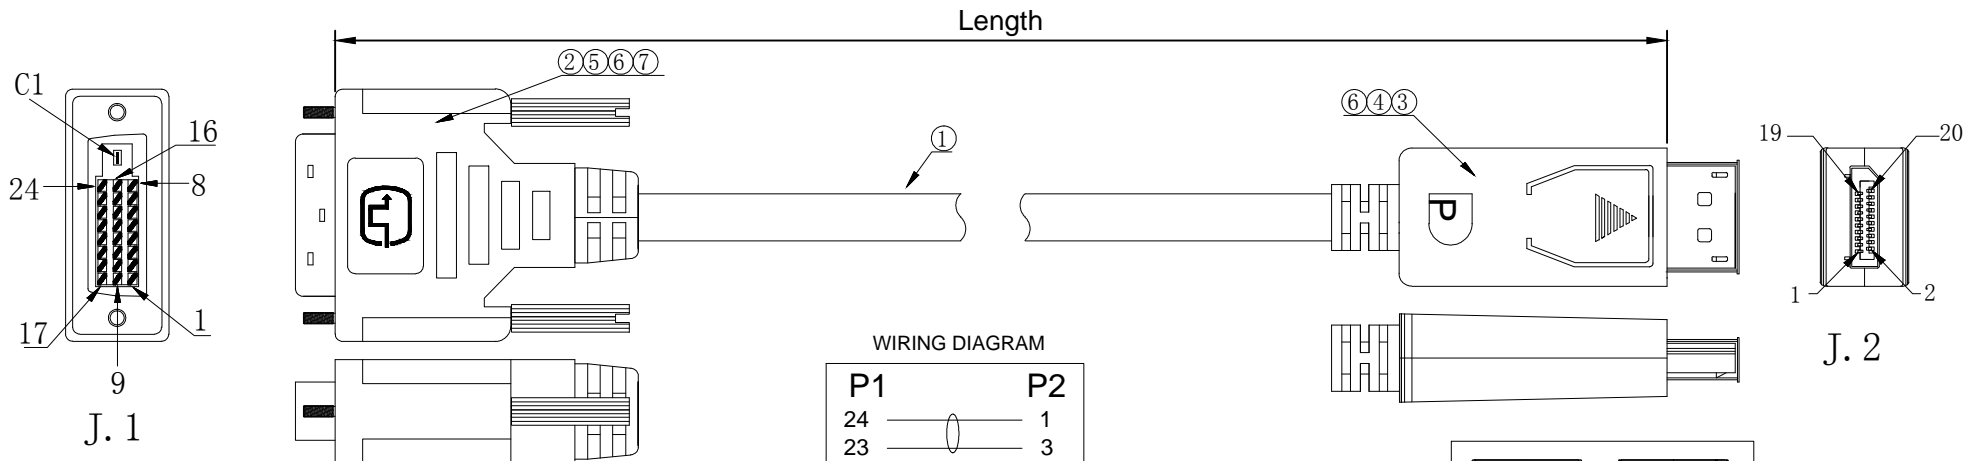


Remarks

- 100% Open/Short Test
- Conductive Resistance:5ohms MAX
- Insulation Resistance:10M ohm MIN.
- HI-POT:DC 300V/10MS.
- The product is RoHS compliant.
- Support 1080P@60Hz

Item NO.	Length(m)
K5564SW.1V2	1.0m
K5564SW.2V2	2.0m
K5564SW.3V2	3.0m
K5564SW.5V2	5.0m

⑦	External Mold	Outer Mould 45P PVC, Black	1PC	
⑥	Internal Mold	Inner Mould PE	1PC	
⑤	SCR	Screw: ϕ 2.3x47mm	2PCS	
④	Shell	DP Male Plastic Shell, Black w/ "D"	1PC	
③	Connector	DP male head hook + PCBA with IC(PS8121E), Gold-Plated	1PC	
②	Connector	DVI 24+1P Male, Gold-Plated	1PC	
①	Cable	UL20276 (30AWG 7/0.10TC*1P+AL+MY)*5 +30AWG(7/0.10TC*4C)+AL+D(7/0.10BC)+B(96/0.12AL) + OD6.0mm PVC, Black		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION		PAGE NO	1/1
		DATE	2019/11/23
APPROVAL	CHECKED	DRAWN	