

Customer P/N: K5284SW.X R00

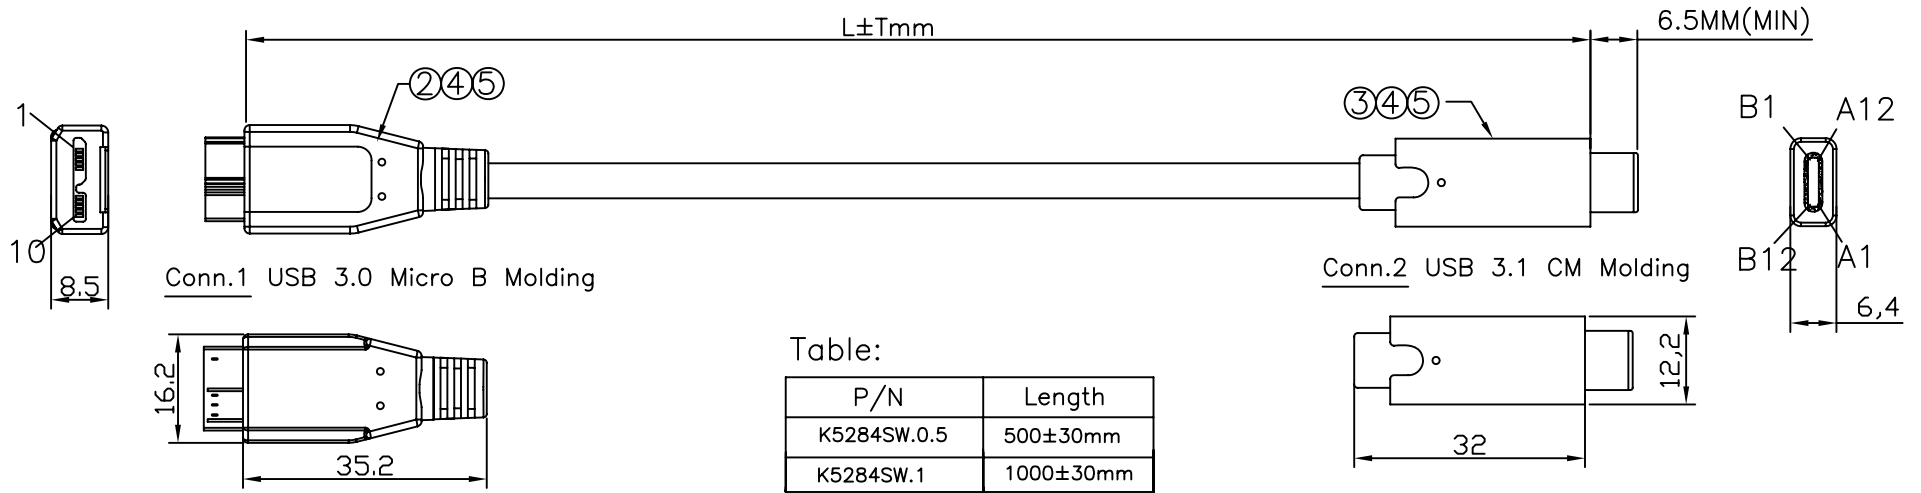



Table:

P/N	Length
K5284SW.0.5	500±30mm
K5284SW.1	1000±30mm

- Electrical Test:
- 100%Test(Open, short ,miss wire)
 - Contact Resistance: 2 ohm max.
 - Insulation Resistance: 5M ohm min.
 - Hi-pot:300V DC/10ms

- NOTE:
- Super High Speed USB 3.0 Cable (7/0.08T*1P+D+AL+MYLAR)*2P+7/0.08T*1P+7/0.2T*2C+F+ADB
OD:4.2±0.2mm Color: Black
 - USB3.1 Micro B Solder Type Shell Nickel Black Insulation,
 - USB3.1 (C) M Solder Type Shell Nickel, Black Insulation,
 - INSIDE MOLDING:PE
 - OUTSIDE MOLDING:Black PVC

Pin Assignment

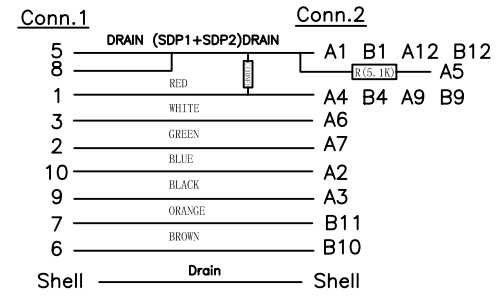

REV.	DATE	CONTENTS OF CHANGE	DESIGNER	TOL ±	Pl	Met	Ins	Por	Cab	Pac	Gas	DIS	APPROVAL	CHECK	DRAWING	DESIGN	DRAWING NAME	USB3.1 Micro B TO C		
				RANGE													DATE	PART NO.	MF	R00
1				0~6	0.1	0.1	0.1	0.2	0.5	1	0.5	0.2					2014-11-08			
2				6~30	0.1	0.1	.15	.25	1	1	0.5	.25								
3				30~80	0.1	.15	0.2	0.3	2	1.5	1	0.3								
4				80~180	.15	.15	.25	0.3	2	2	1	.45								
5				180~315	.15	0.2	0.3	0.4	2.5	2	1	0.6								
				315~800	0.2	0.3	0.4	0.5	3	3	2	1.1								



SCALE 1:1 UNIT MM