



FVM-1101 Version: 1

Managebarer RJ45 zu SC Fast-Ethernet-Mediakonverter, Multi-Mode Fiber

FVM-1101 is remote Managed Fast Ethernet fiber media converter with OAM functions developed by our company. It can convert Ethernet signal between 10/100Base-Tx and 100Base-FX, It supports both half-duplex and full-duplex operations and a variety of fiber options. It is double fiber, multi mode, 2km media converter

Remote devices can be managed by fiber-connected OAM media converter or OAM switch when deployed as a stand-alone solution. It incorporates an easy to use Web user interface for operation, administration and maintenance, both locally and remotely. By offering IEEE802.3ah OAM compliance, this converter can be linked to any IEEE802.3ah compliant fiber switch and support loop back and dying gasp functions. All functions of this converter and the remotely connected converter can be configured and monitored via Web management, including bandwidth control, duplex, speed and VLAN configuration.

Key-features

- Integrierte LFP- (Link Fault Pass-through) (LLCF/LLR) Technologie
- Webbasiertes und SNMP-Verwaltung
- IEEE-802.3x Flow-Control schützt vor Packet-Loss und sorgt für zuverlässige Datenübertragung
- unterstützen VLAN (Tag-basiertes, Q-in-Q)

Specifications

System Specifications

Standards & Protocols:

IEEE802.3 10Base-T Ethernet,
 IEEE802.3u 100Base-Tx Fast Ethernet,
 IEEE802.3u 100Base-Fx Fast Ethernet,
 IEEE802.3x Flow Control,
 IEEE802.3ah OAM

Connectors and Cabling:

1 x RJ45 Ethernet port,
 1 x SC/ST/FC fiber connector

Wellenlänge (nm):

1310nm

Indikator:

PWR (power supply),
 FX LINK/ACT (optical link action)
 FDX (full duplex),
 TX LINK/ACT (TP cable link/action)
 TX 100 (TP cable rate 100M),
 LFP(LFB function enable/disable)

**Transmission Method:**

store and forward or cut-through by software configure

Power Input:

internal: 100~240VAC in, 5V@2A output

Features

General:

1. 10/100Mbps auto-sensed, facilitating network upgrade
2. Support LFP function
3. Built-in efficient switching core to implement flow control and reduce broadcast packets
5. Support SC/ST/FC fiber connector
6. Support Jumbo frame up to 9k bytes
7. Support Q-in-Q function, Optical port and Ethernet port can be set separately as dual Tag ports, and can be set as ISP Tag and ISP Tag TPID
8. Support configure the operation mode of each port on local and remote devices, including port speed, full/half-duplex, and flow control, etc, and can display the real-time status of each port
9. Support bandwidth-limiting function: with the step of 64kps, the bandwidth can be set between 0Mbps and 100Mbps
10. Support 4 kinds of 802.3ah OAM functions: Discover of OAM, MIB variable response, OAM Loopback, Dying Gasp alarm
11. Offer MIB library files, support OpenView?Snmpc, and other softwares

Performance

Operating Distance:

2km

Environment

Temperatur (°C):

-10~55

Luftfeuchtigkeit (nicht kondensierend):

5%~90% non-condensing

Deployment:

Desk, Wall mounted

Physical Specifications

Abmessungen (W x D x H mm):

127mm×156mm×32mm

Gewicht:

720

Zuverlässigkeit

MTBF:

30000hours

Approval and Compliance


Zertifizierung:

FCC, CE, RoHS

Diagramm

Dimension Diagram

— Cat.5 UTP
— Fiber

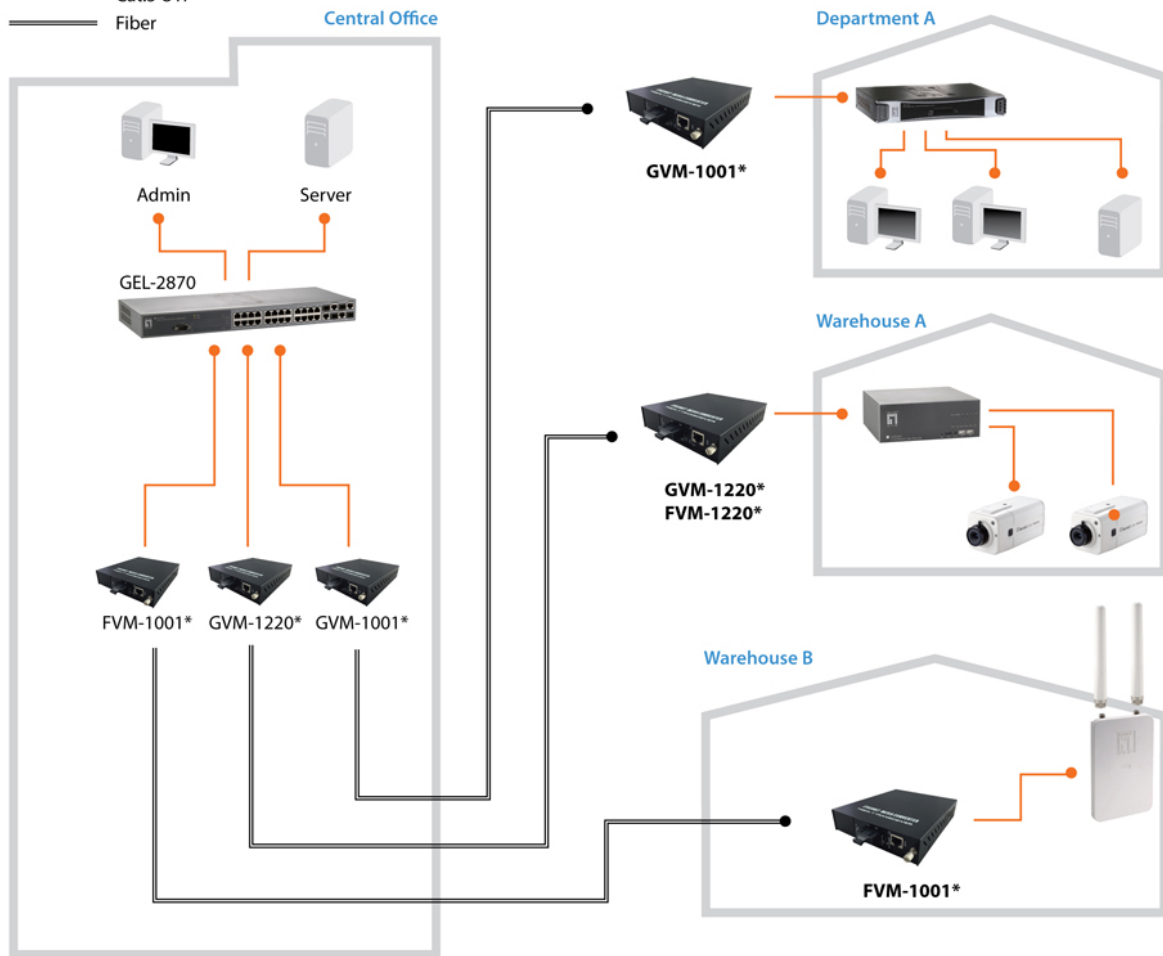

*In above example diagram, converter modules at local and remote ends should be paired for proper connectivity, and the distance mainly depends on cable and transceiver selection accordingly.

Order Information

FVM-1101

Package Contents

FVM-1101

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.