



REVISIONS

REV	DATE	DESCRIPTIONS	APPRO.BY

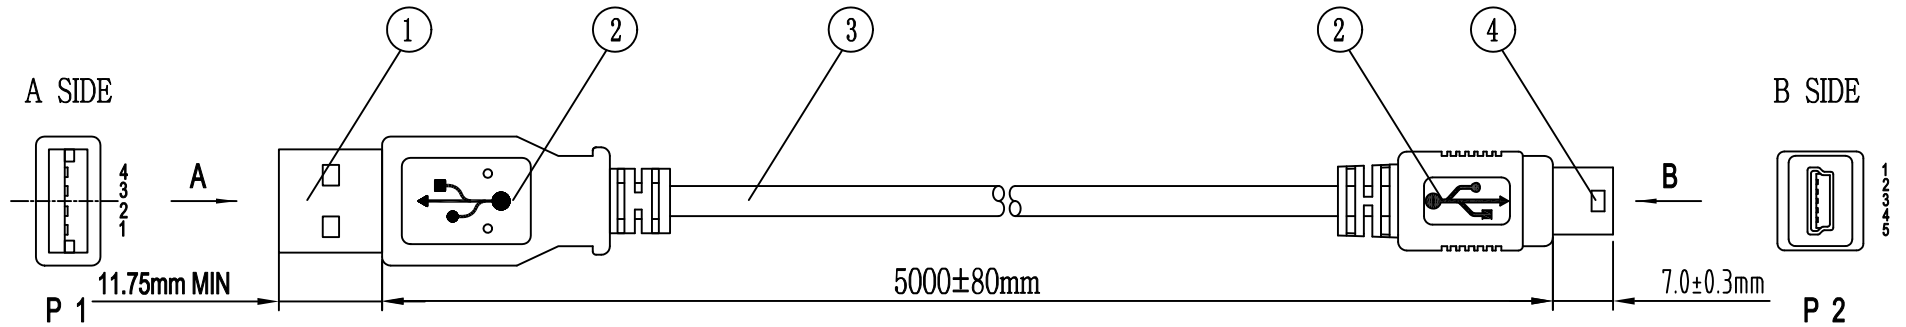

WIRING DIAGRAM

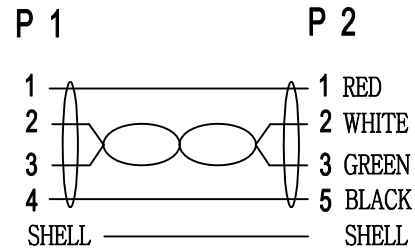

NOTE:

- 1.PRINTING:
AWM 80°C 30V VW-1 28AWG×1P 24AWG×2C
USB2.0 HIGHSPEED CABLE
- 2.RoHS COMPLIANT

④	CONNECTOR	MINI USB 5Pin B TYPE MALE NICKEL PLATED SHELL 1u" GOLD PLATED PIN,WHITE INSULATOR	1 Set
③	CABLE	28AWG TXR*1P+ 24AWG TXR*2C+ AL+ B(COVERAGE RATE IN 65%) USB2.0 HIGHSPEED CABLE JACKET PVC GREY OD=4.5±0.2mm	1Pcs
②	OVERMOLD	PVC COLOR:GREY	2Pcs
①	CONNECTOR	USB A TYPE MALE NICKEL PLATED SHELL 1u" GOLD PLATED PIN,WHITE INSULATOR	1 Set
NO.	MAT.NANE	DESCRIPTION	Q'TY

CUSTOMER'S ITEM		K5250.5V2		CUSTOMER		EFB		
DRAWING				TITLE		USB CABLE		
UNIT	mm	SCALE	1:1	REV				
DRAWN BY		CHECK BY		APPRO BY		DATE		
Zhouqinghua						2020-09-01		