

P1

1000 ± 30MM

P2


NOTES:
1. MATERIALS

- 1.1 CABLE: (7/0.08BC*1P+7/0.08BC+FAM)*2PCS+7/0.12BC*2C+7/0.12BC*1P+AM+7/0.12BC+80/0.12ALM+BLACK PVC JACKET.

OD=4.5 ± 0.15MM
CABLE PRINTING: USB 3.0 HIGH SPEED CABLE

- 1.2 P1: USB3.0 A TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
- 1.3 P2: USB3.0 B TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
- 1.4 ALL HOOD: MOLDED BLACK PVC.
- 2. ELECTRICAL
100% OPEN AND SHORT TEST.
- 3. PACKING: 1PC/PE BAG.
- 4. ALL MATERIAL BE ROHS COMPLIANT.

PIN UOT

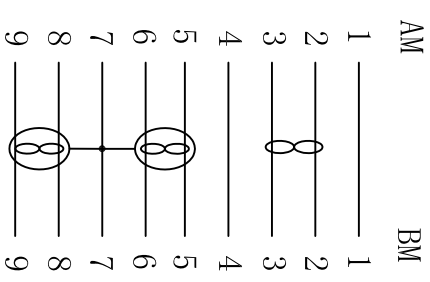

SHELL BRAID+DRAIN SHELL



A

B

C

D

E

A

B

C

D

E

00	NEW ISSUE	2013-04-12
REV.	MODIFY DESCRIPTION	DATE

LENGTH TOLERANCE: X. ± 0.5 .X ± 0.2 .XX ± 0.1	SCALE: FREE	CUS. NAME: FFB
ANGLE TOLERANCE: X° ± 3° .X° ± 1°	UNIT: mm	PAGE: 1/1
VERSION: 01	DRAWING NO.: 0668	

SHIP GUANGXI SHIP ELECTRONICS CO., LTD

PRODUCT NO: K5247SW.1	CUSTOMER NO:
PRODUCT DESCRIPTION: USB 3.0 AM/BM	APPROVED:

ENG:
MerLin

CHECKED:
