


ITEM NO.	Length "L"	Length "X"
K5204.05	500mm	480mm
K5204.1	1000mm	980mm
K5204.1,8	1800mm	1780mm
K5204.2	2000mm	1980mm
K5204.3	3000mm	2980mm
K5204.5	5000mm	4980mm

NOTE: ALL relevant materials are complied with RoHS directive

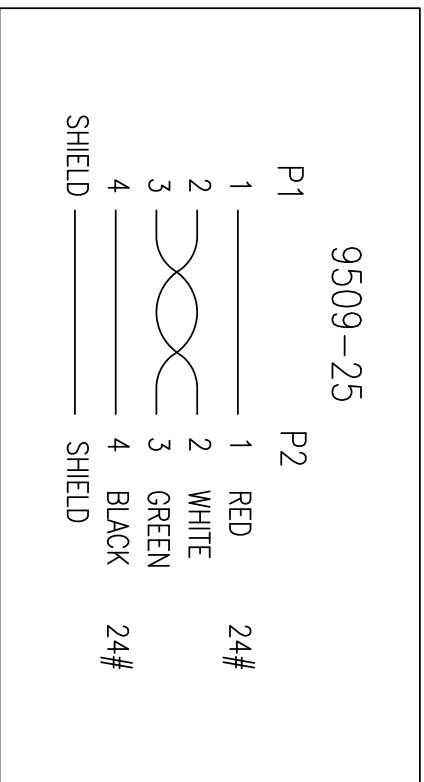

REV.2 2016.10.14
REV.1 2015.10.23

ADD LENGHT
Modify the drawing frame

REV.3 2016.11.28

ADD LENGHT
CHECKED

3	MOLDED PVC BLACK(LSZH)	ASAC02-0751	M751
2	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, AEB(65%) OD 4.5mm, JACKET BLACK(LSZH), DRAWING No.EUAE2801P2402C-623	HSKH04-0304K09	M304
1	USB A MALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE	A1HA22-0454	M454
No.	DESCRIPTION		
PART NO.	9509-25	Revision:	
APPROVED			
CHECKED	HU		
DRAWING	LI		
DATE	28/NOV/16	ITEM NO.	K5204.X
		UNIT:mm	

ELEKTRONIK

Cable Length
Unless Other Spec.
Tolerances:

0 ~200mm
201~1000mm
1001 ~1500mm
1501~2100mm
2100mm ↓

±10mm
±20mm
±25mm
±30mm
±40mm

