






REVISIONS			
REV	DATE	DESCRIPTION	APPRO. BY




NOTE:

1. Electrical test:

- (1). 100% open short & miss wire test;
- (2). Insulation resistance: DC 200V 10MΩ MIN;
- (3). Conductor resistance: 3Ω MAX

2. RoHS Compliant.

WIRE TABLE

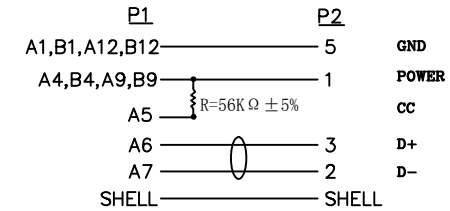

MATERIAL LIST:

⑤	PLASTIC HOOD	ABS COLOR/BLACK	1	
④	INNER MOLD	PVC COLOR/BLACK	1	
③	PCBA	USB MICRO BF TO TYPE CM PCBA	1	
②	CONNECTOR 2	USB 3.1 C TYPE PIN Gold-Platde Fu", Shell Ni-Plated;	1	
①	CONNECTOR 1	USB MICRO BF PIN Gold-Platde Fu", Shell Ni-Plated;	1	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT' Y	REMARK

CUSTOMER'S ITEM		CUSTOMER	EFB	
DRAWING	BD-ZQH0027	TITLE	TYPE C ADAPTER	
UNIT	mm	SCALE	REV	A/0
DRAWN BY	CHECK BY	APPRO BY	DATE	
Zhouqinghua			2020/2/21	

