

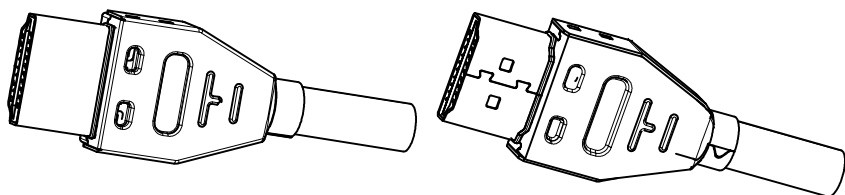



REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2019/12/18	

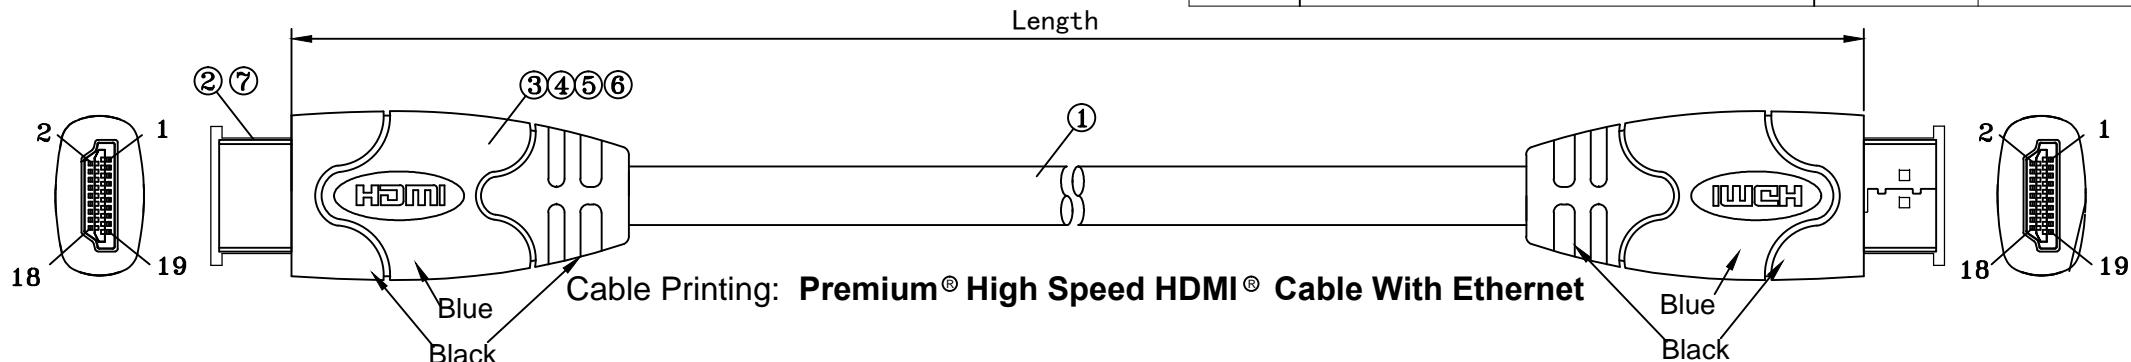

Cable Spec.

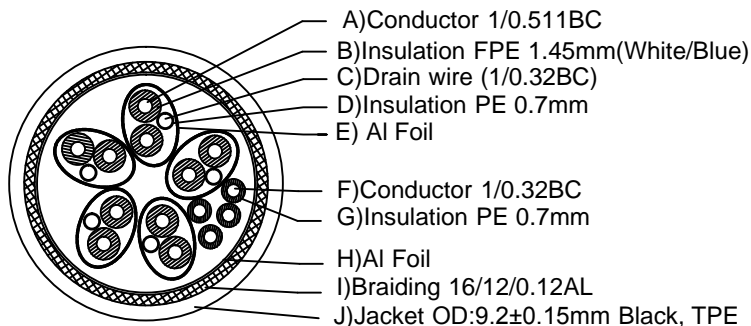

Signal Assignment

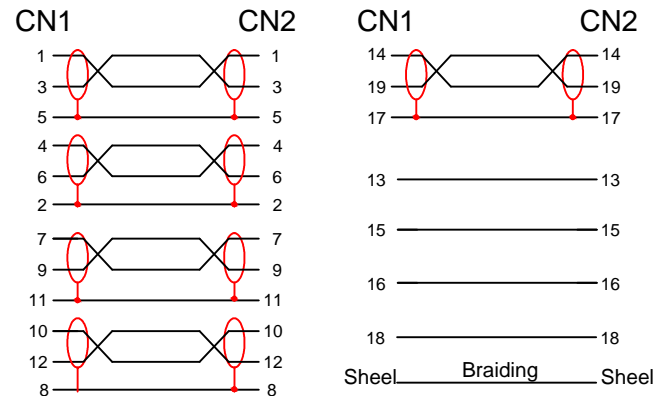


Remark:

- 1.100% Open/Short Test
- 2.Conductive Resistance:10ohms MAX
- 3.Insulation Resistance:5M ohm MIN.
- 4.HI-POT:DC 300V/10MS.
- 5.The product is Reach/RoHS 2.0 compliant.
- 6.Support 1080P/3D/4K*2K@60Hz.

Item NO.	Length(m)
K5431PRSW.6	6.0m

⑦		HDMI Protective Cap, PE		
⑥	External Mold II	Outer Mould, Blue	2PCS	
⑤	External Mold I	Outer Mould, Black	2PCS	
④	Shielding Shell	Shielding Shell,tinplate	2SETs	
③	Copper Foil	Copper Foil	2PCS	
②	Connector	HDMI A PLUG PIN, Gold-Plated	2PCS	
①	Cable	24AWG 1.4V (19+1BC) HDMI Cable OD:9.2mm,TPE (0.511BC+FPE)*1P+D+AL] *5C + (0.32BC+HDPE)*4C + D + AL + PVCOD9.2mm,TPE Black		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	Premium HDMI2.0V 19+1 BC	PAGE NO	1/1
		DATE	2019/12/18
APPROVAL	CHECKED	DRAWN	