

POR-0200 Version: 1

PoE-Repeater, Kaskadier

Extend the reach of your PoE-Plus devices

For system integrators looking for a professional solution to help extend their PoE (802.3af/at) network, POR-0200 is the perfect accessory to increase your network performance.

Normal cable runs only reach 100 meters, but with POR-0200 installers can extend the PoE network performance up to 200 meters. Furthermore, you can triple your range or even more by daisy-chaining* multiple PoE repeaters.


* Maximum distance depends on the required Wattage of the PD.

Simple yet durable, no software required

As a PoE-Plus Repeater, POR-0200 receives all power from the Power Sending Equipment (PSE), such as a PoE-Plus switch. This means that POR-0200 uses no external power supply, making it the most flexible option for system integrators looking for an easy, affordable solution to increase the distance to the attached devices on a network. POR-0200 has 3 RJ-45 ports for easy deployment, 1 "IN" port that accepts the power and data for the first 100 meters, and 2 "OUT" ports for 1 PoE (power + data) and 1 non-PoE (data only) installation, that boosts and extends the device an additional 100 meters. With a durable metal housing, POR-0200 fits into any tight deployments.

Applications

POR-0020 is a long-ranged solution for deploying PoE IP Camera and any Fast Ethernet PoE PD powered by 802.3at PSE.

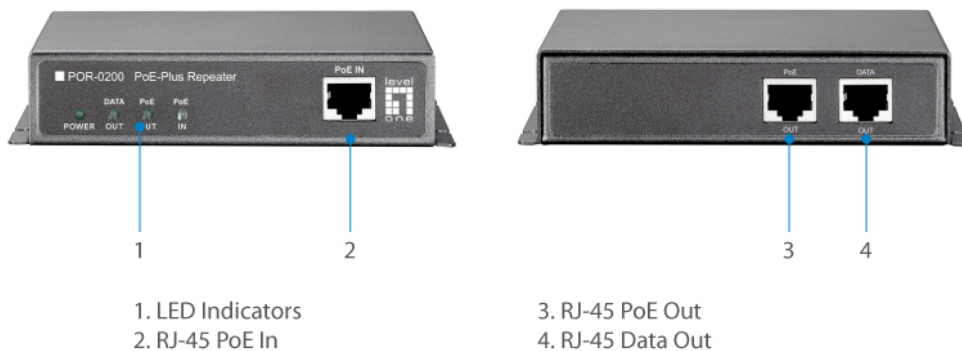

Key-features

- High Power Midspan PoE compliant to simplify deployment and installation
- 2 integrierte Ausgänge für 1 PoE und 1 Non-PoE-Geräte
- Stromversorgung über Ethernet (802.3af/at PoE) an Remote-Gerät



- Erweiterte PoE-Verbindung für weitere 100 Meter
- Mehrere PoE-Verstärker können durch Daisy-Chain zur Reichweitenverlängerung eingesetzt werden
- Einfache Plug-and-Play-Installation, keine zusätzliche Stromversorgung erforderlich

Works With



FEP-0811

8-Port-Fast Ethernet-PoE-Switch, 802.3at PoE+, 123.2W

Specifications

System Specifications

Standards & Protocols:

IEEE 802.3 10Base-T, Ethernet
IEEE 802.3u 100Base-TX, Fast Ethernet
IEEE 802.3x Ethernet Flow Control
IEEE 802.3af Power over Ethernet (PoE)
IEEE 802.3at Power over Ethernet Plus (PoE+)

Connectors and Cabling:

1 x 10/100Base-TX RJ-45 PoE Input Port
1 x 10/100Base-TX RJ-45 PoE Output Port
1 x 10/100Base-TX RJ-45 LAN Output Port

Indikator:

Power, PoE In, PoE Out

Power Input:

PoE Power Input: 44-57 Volt
Power Consumption: 2.5W (Max.)

Features

PoE:

IEEE 802.3af/at compliant

Environment

Temperatur (°C):

Operating: 0°C ~ 50°C

Storage: 0°C ~ 70°C

Luftfeuchtigkeit (nicht kondensierend):

Storage: 5% to 95%

Operating: 5 ~ 95%

Deployment:

Wall mount

Physical Specifications

Abmessungen (W x D x H mm):

120 x 90x 28mm


Gewicht:

400 g

Approval and Compliance

Zertifizierung:
FCC Part 15, CE, RoHS

Diagramm

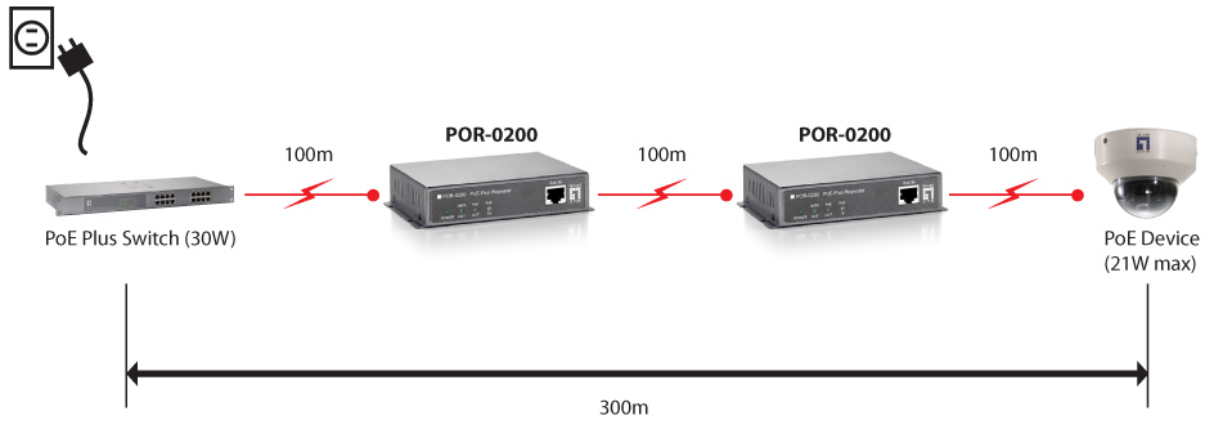

Order Information

POR-0200

Package Contents

POR-0200
Quick Installation Guide

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.