
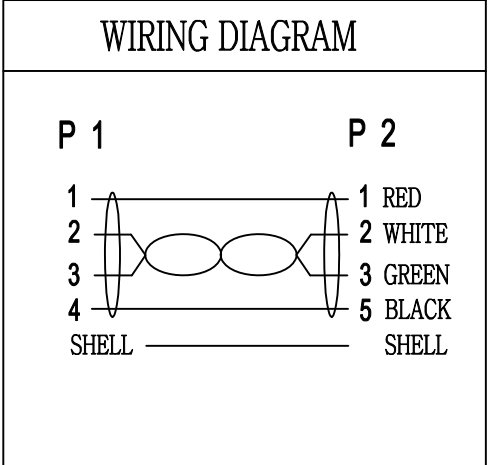


REVISIONS			
REV	DATE	DESCRIPTIONS	APPRO.BY

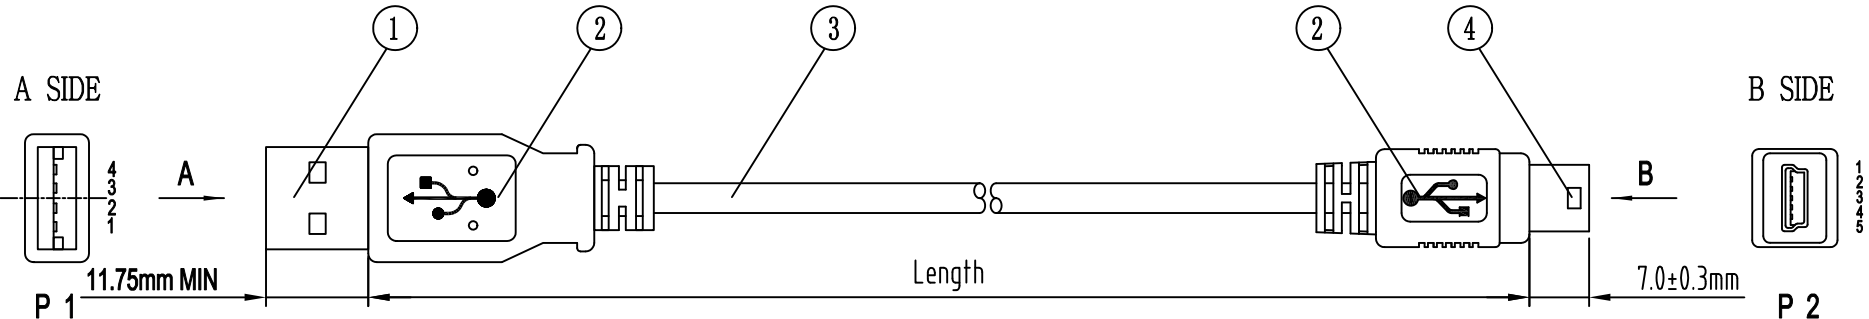

GREY	
EFB NO:	Length
K5250.0,5V2	500±10mm
K5250.1V2	1000±20mm
K5250.1,5V2	1500±30mm
K5250.1,8V2	1800±30mm
K5250.3V2	3000±50mm

NOTE:
 1.PRINTING:
 AWM 80°C 30V VW-1 28AWG×1P 28AWG×2C
 USB2.0 HIGHSPEED CABLE
 2.RoHS COMPLIANT

④	CONNECTOR	MINI USB 5Pin B TYPE MALE NICKEL PLATED SHELL 1u" GOLD PLATED PIN,WHITE INSULATOR	1 Set
③	CABLE	28AWG TXR*1P+ 28AWG TXR*2C+ AL+ B(COVERAGE RATE IN 65%) USB2.0 HIGHSPEED CABLE JACKET PVC GREY OD=4.5±0.2mm	1Pcs
②	OVERMOLD	PVC COLOR:GREY	2Pcs
①	CONNECTOR	USB A TYPE MALE NICKEL PLATED SHELL 1u" GOLD PLATED PIN,WHITE INSULATOR	1 Set
NO.	MAT.NANE	DESCRIPTION	Q'TY

CUSTOMER'S ITEM	K5250.XV2	CUSTOMER	EFB	
DRAWING		TITLE	USB CABLE	
UNIT	mm	SCALE	1:1	
DRAWN BY	CHECK BY	APPRO BY	DATE	
Zhouqinghua			2020-09-01	