


CONCAVE LETTERING MARKING CABLE:

- (UL) SVT 3/C 18AWG(0.824MM²) VW-1 75°C 300V E204978
- (UL) SVT 3/C 0.824MM²(18AWG) FT2 60°C 300V E204978 MSL

105107B1F18C(FP019-01)	
P1	P2
BLACK	L _____ L
WHITE	N _____ N
GREEN	E _____ E

PAGE: 1 of 2

NOTE: All relevant materials are complied with RoHS directive .

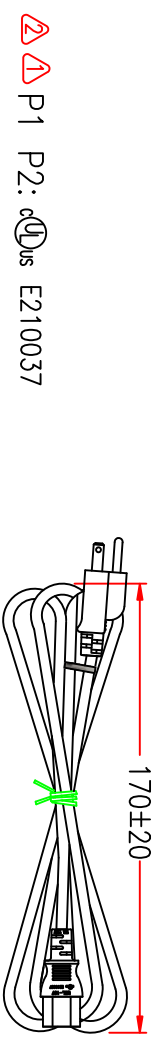



REV.6 2022.01.21	MODIFY CONCAVE LETTERING MARKING CABLE AND ADD LABEL&LABEL 1~LABEL 2
REV.4 2018.01.31	ADD ITEM NO. REV.5 2018.09.20 ADD ITEM NO.
REV.2 2017.08.09	MODIFY CABLE DRAWING NO.EPSYT011803C-099 FROM EPSYT011803C-028
REV.2 2017.07.19	MODIFY P1 P2 PLUG MODEL LOGO,CONCAVE LETTERING MARKING CABLE.
REV.1 2014.10.22	MODIFY MODEL MARKING

No.	DESCRIPTION	Q'TY	Supplier
3	UL SVT 18AWG*3C, OD 6.3mm,PVC JACKET WITH BLACK COLOR, DRAWING No. EPSYT011803C-099		
	MOLDED PVC 35P, COLOR BLACK		
	BRACKET: CP-R445A-BS		
2	TERMINAL: 2*4mm, 98740BS-0/A		
	MOLDED PVC 35P, COLOR BLACK		
	BRACKET: YS-002		
	TERMINAL: 98661BS-1		
1	TERMINAL: Ø4.75 MSL-105 98475BS-1		

APPROVED	CHECKED	DESIGNER	DRAWING	DATE	ITEM NO.	UNIT:mm
	HU	ZHU	ZY	21/JAN/22	EK518.X	

--	--

Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm± ±40mm	
---	--

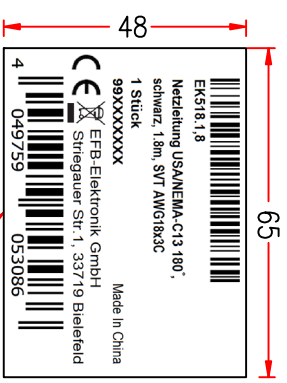

ITEM NO.	LENGTH:(L)	LABEL
EK518.1,8	1800mm	LABEL 1
EK518.2	2000mm	
EK518.2,5	2640mm	
EK518.0,75	750mm	LABEL 2

PAGE: 2 of 2

REV.6 2022.01.21	MODIFY CONCAVE LETTERING MARKING CABLE AND ADD LABEL&LABEL 1~LABEL 2
REV.4 2018.01.31	ADD ITEM NO. REV.5 2018.09.20 ADD ITEM NO.
REV.2 2017.08.09	MODIFY CABLE DRAWING NO.EPSVT011803C-099 FROM EPSVT011803C-028
REV.2 2017.07.19	MODIFY P1 P2 PLUG MODEL LOGO,CONCAVE LETTERING MARKING CABLE.
REV.1 2014.10.22	MODIFY MODEL MARKING

No.	DESCRIPTION	Q'TY	Supplier
APPROVED			
CHECKED			
DESIGNER			
DRAWING			
DATE		21/JAN/22	ITEM NO.



Cable Length Unless Other Spec.
Tolerances:
0 ~200mm ±10mm
201~1000mm ±20mm
1001 ~1500mm ±25mm
1501~2100mm ±30mm
2100mm± ↓ ±40mm

