



P1: M-003

P2: M-028A



Customer No:

No.: 6

P1

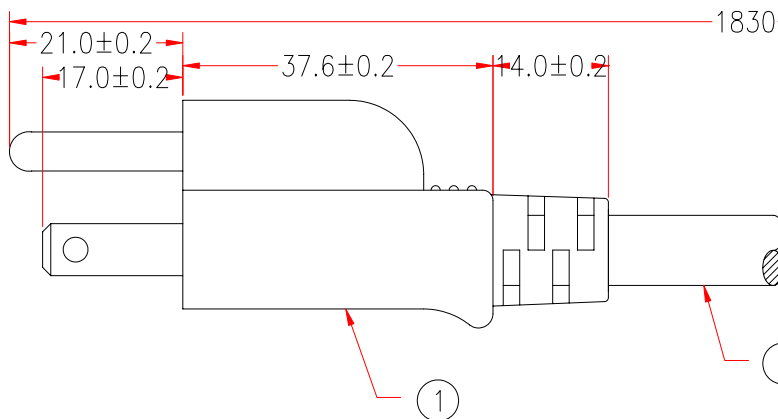


PLUG: 105

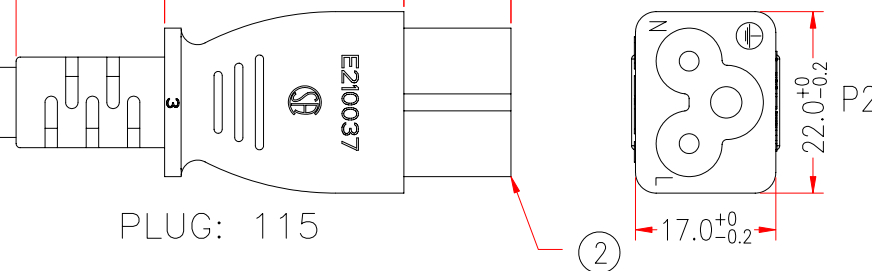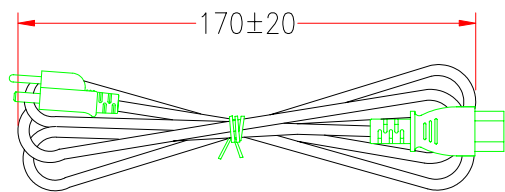

P2

PLUG: 115

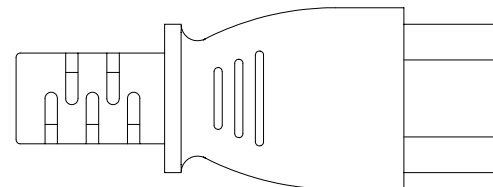

P1.P2: E210037



MARKING:

(UL) SVT 3/C 18AWG(0.824MM²) VW-1 75°C 300V E204978
 CSA SVT 3/C 0.824MM² (18AWG) FT2 60°C 300V LL204790

	P1		P2
BLACK	L	————	L
WHITE	N	————	N
GREEN	E	————	E

NOTE: All relevant materials are complied with RoHS directive .

3	UL SVT 18AWG x 3C, OD 6.3mm, JACKET BLACK, DRAWING No.EPSVT011803C-028	1800mm	M304
2	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: HB-011C0416050102	1	M765
	TERMINAL: 98732PS-0	1	M257
1	TERMINAL: 98714PS-0	2	M257
	MOLDED PVC BLACK, 35P		M304
	BRACKET: YS-002	1	M767
1	TERMINAL: 98661BS-1	2	M257
	TERMINAL: ø4.75mm SH403	1	M256
No.	DESCRIPTION	Q'TY	Supplier

PART NO. 105115B1F18B

Revision:

APPROVED
 CHECKED TIAN
 DRAWING HUANG




Cable Length Unless Other Spec.
 Tolerances:
 0 ~200mm ±10mm
 201~1000mm ±20mm
 1001 ~1500mm ±25mm
 1501~2100mm ±30mm
 2100mm↑ ±40mm

DATE 30/OCT/07 ITEM NO.

EK497.1,8

UNIT:mm



CHECKED