


P1:	M-942H
P2:	M-Y928C
	M-928C

Customer No: No.6

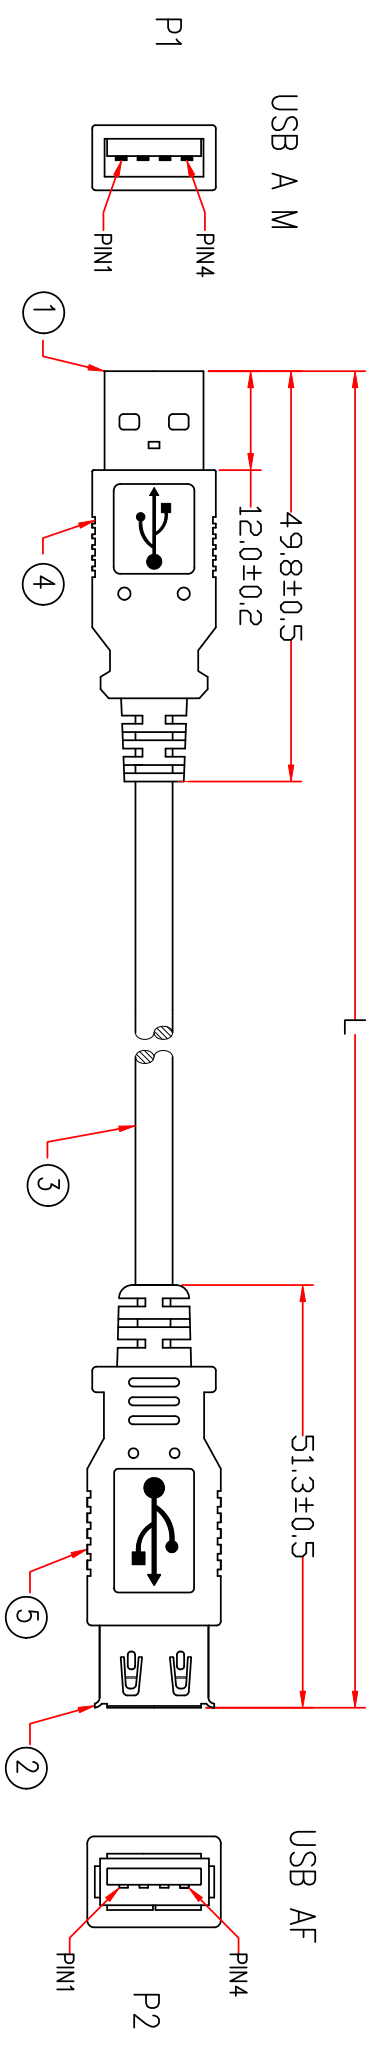

ITEM NO.	L(mm)	X(mm)
K5205.0,2	200mm	180mm
K5205.0,5	500mm	480mm
K5205.1	1000mm	980mm
K5205.1,8	1800mm	1780mm
K5205.3	3000mm	2980mm
K5205.5	5000mm	4980mm

9466-36	
P1	P2
1	1 RED 24#
2	2 WHITE
3	3 GREEN
4	4 BLACK 24#
SHIELD	SHIELD

NOTE: All relevant materials are complied with RoHS directive .

REV.4 2019.05.24	MODIFY CONTENT	REV.3 2016.11.28	ADD LENGHT
REV.2 2016.10.14	ADD LENGHT		CHECKED
RE.1 2015.09.08	MODIFY DRAWING		

5	BLACK HEAT SHIRK TUBE $\phi 1.5 \times 8\text{mm}$	A4HA24-0959	1	M959
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED MATERIAL LSZH (BLACK)	A5AC02-0750		M750
4	MOLDED MATERIAL LSZH (BLACK)	A5AC02-0750		M750
3	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, AEB85% (OD 4.5mm, JACKET BLACK)(SZH) DRAWING No.EUAE28012402C-623	H5KH04-0304K09	Xmm	M304
2	USB A FEMALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR	A1HC03-0432	1set	M432
1	USB A MALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE	A1HA22-0454	1set	M454
PART NO. 9466-36		Revision:		
APPROVED				
CHECKED	HU			
DRAWING	JIANG			
DATE	24/MAY/19	ITEM NO.	K5205.X	
Cable Length Unless Offer Spec.		UNIT: mm		
Tolerances:				
0 ~ 200mm				
201 ~ 1000mm				
1001 ~ 1500mm				
1501 ~ 2100mm				
2100mm ↓				