

# Multimode LC/LC Duplex adapter, plastic housing, ceramic sleeve, white dust cap.

## Specification

Sleeve Material	CERAMIC
Typical Insertion Loss, dB	0.1
Max Insertion Loss, dB	0.2
Durability(1000 Mating)	0.2dB Max.Increase
Operating Temperature, °C	-40 ~ +85
Storage Temperature, °C	-40 ~ +85

The performance of the adaptors has been carefully designed to meet the toughest Telcordia standards




### GR-326-CORE

### RoHS-Compliance of item and package

### Conformance according to IEC 61754-20

in the tests of:

- OPTICAL CHARACTERISTICS
- VIBRATION TEST
- THERMAL CYCLING
- IMPACT RESISTANCE
- SALT SPRAY EROSION
- THERMAL AGING
- HUMIDITY RESISTANCE
- OTHERS

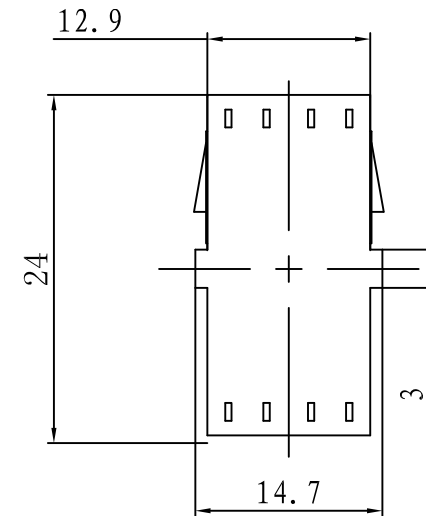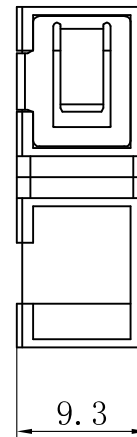

REV	REVISION RECORD DESP.	ZONE	BY	DATE
-----	-----------------------	------	----	------

1

2

3

4

5