


Length "L"	Length "X"
2000mm	1980mm
3000mm	2980mm

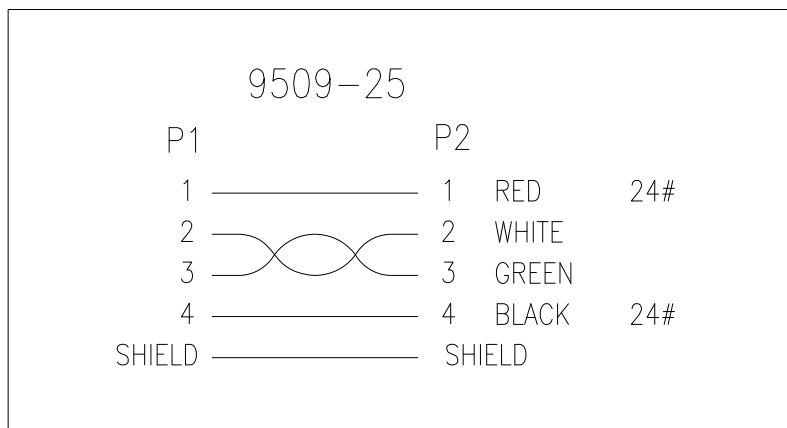

⚠ \*NOTE: ALL relevant materials are complied with RoHS directive

3	MOLDED PVC BLACK(LSZH)	A5AC02-0751		M751
2	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, AEB(65%) OD 4.5mm, JACKET BLACK(LSZH), DRAWING No.EUAB2801P2402C-623	H5KH04-0304K09	Xmm	M304
1	USB A MALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE	A1HA22-0454	2	M454
No.	DESCRIPTION		Q'TY	Supplier

PART NO. 9509-25

Revision:

APPROVED  
CHECKED HU  
DRAWING JWJ

**E F B**  
**ELEKTRONIK**

Cable Length Unless Other Spec.  
Tolerances:  
0 ~200mm ±10mm  
201~1000mm ±20mm  
1001 ~1500mm ±25mm  
1501~2100mm ±30mm  
2100mm↑ ±40mm

DATE 23/OCT/15 ITEM NO.

K5204.x

UNIT:mm

