


Wire & Cable Specification Modular Flat Telephone Cable

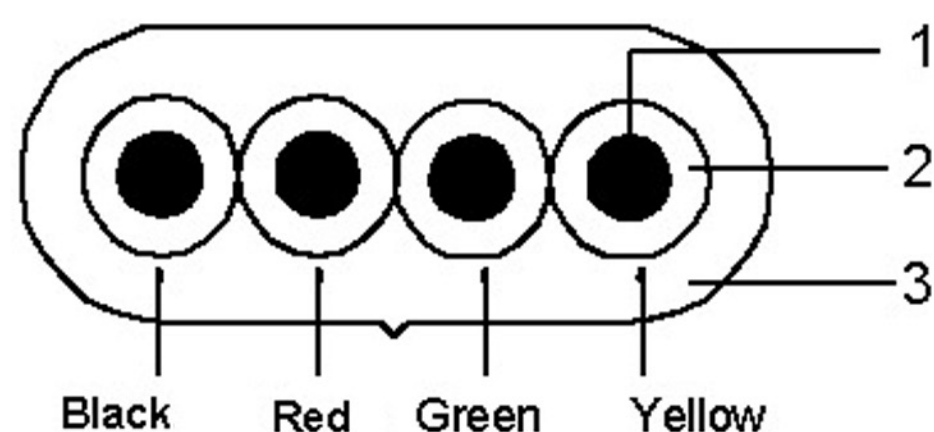

1. Conductor
2. Insulation
3. Sheath

Doc. No. : 92804.1	Issue No. : 01	Page : 1 of 1
Effective Date : 15-08-2004	Prepared : Lqm	Checked : EP Approved : EP
Type	Flat Telephone Cable	
Code	92804 (EFB)	
Description	AWG28/7/0.12mm x 4C (PP O.D.0.95mm) + PVC Sheath F 2.5x5.0mm	
Conductor	AWG28/7, 7/0.12±0.003mm x 4C	
Insulation	Material : (PP) Polypropylene	
	Core Color : Black, Red, Green, Yellow	
	Min. Thickness 0.25mm / Nom. Thickness ≥0.29mm	
	Nom. O.D 0.95+0.05/-0mm Spark Voltage: 4000V a.c	
Sheath	Material : PVC/Color: Black	
	Min. Thickness 0.48mm / Nom. Thickness ≥0.60mm	
	Nom. O.D 2.5x5.0+0.2/-0mm	
Physical Properties		
Electrical Properties	Conductor Max. D.C Resistance : 237.25 ohm/km 20°C	
Temperature rating	0 - 60°C	
Operating Voltage	300 V	
Remarks	ROHS compliant	
Packing	Available length in 100, 500m & 1000m.	