

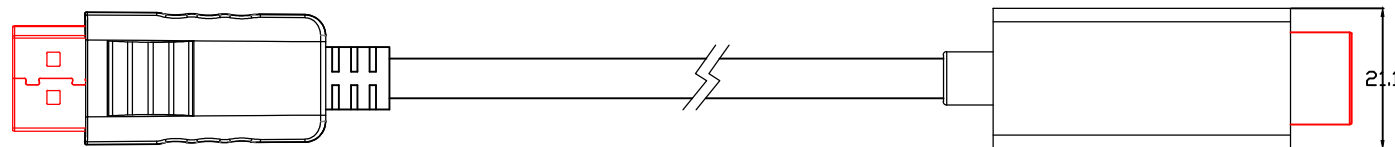
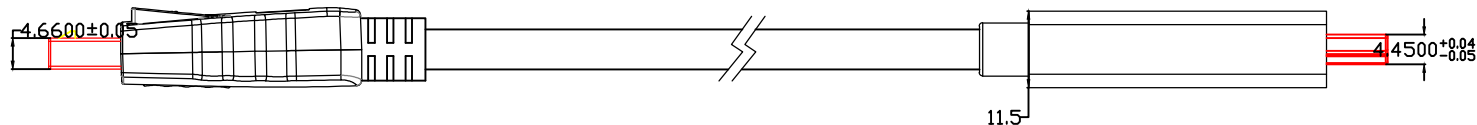


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2021/05/20	

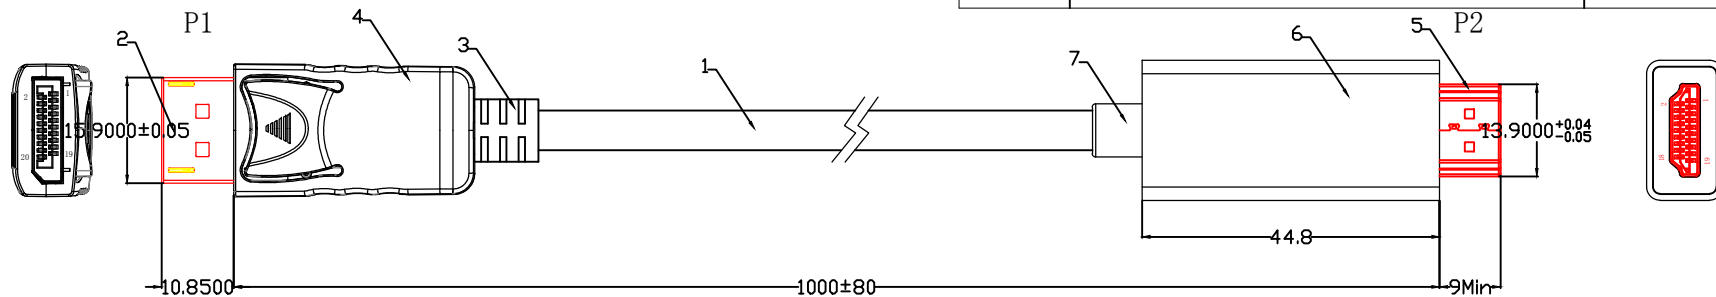

Signal Assignment

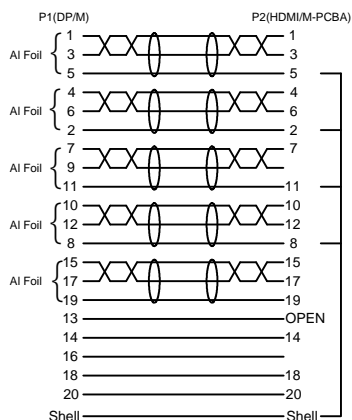


Item NO.	Length(m)
K5561HQSW.1	1.0m
K5561HQSW.2	2.0m
K5561HQSW.3	3.0m
K5561HQSW.5	5.0m

Remark:

- 1.100% Open/Short Test
- 2.Contact Resistance: 30mOhm MAX.
- 3.Insulation Resistance:10M Ohm MIN.
- 4.HI-POT:DC 300VDC/10ms.
- 5.The product is RoHS compliant.
- 6.100% on-board test (the resolution of host to display extended test is 3840x2160 @ 60Hz)

⑦	External Mold	SR,45P PVC, Black	1PC	
⑥	Shell	Front / rear shells. ABS,Black	1SETs	
⑤	HDMI / PCBA	HDMI A Male,Gold-Plated, 4μ~6μ. CHIP:PS176	1PC	
④	Shell	Top/bottom shell. ABS,Black	1SETs	
③	Internal Mold	Inner Mould PE		
②	Connector	DP male head hook, Gold-Plated,4μ~6μ	1PC	
①	Cable	DP Cable (7/0.10TS*1P+D/0.254+AL+MY)*5+ 7/0.10TS*5C+D/0.254+96/0.12AL,OD:6.0mm, Black PVC		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION		HDMI M - DP M 30AWG	
APPROVAL		DATE	
		2021/05/20	
CHECKED		DRAWN	