

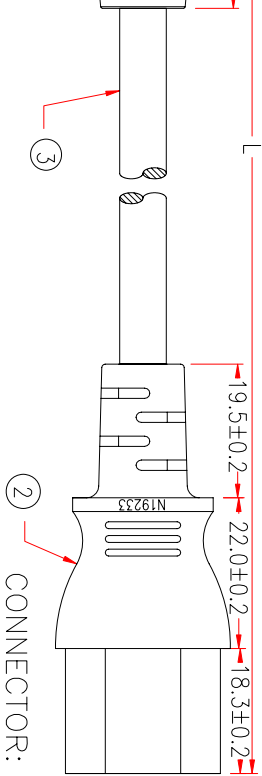
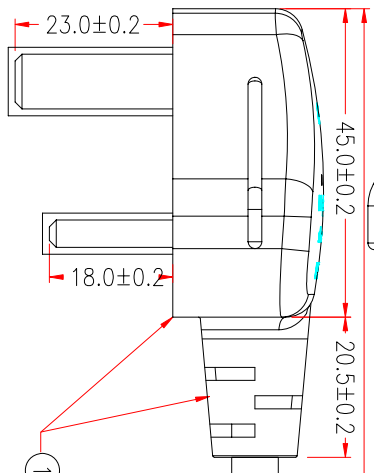
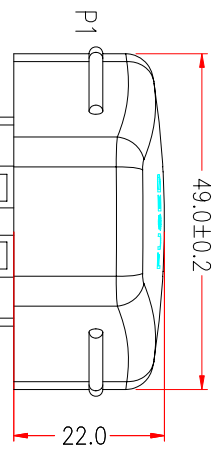


P1: M-015C  
P2: M-005

Customer No.: No.6


LOGO	FUSE
	10A

FUSE:

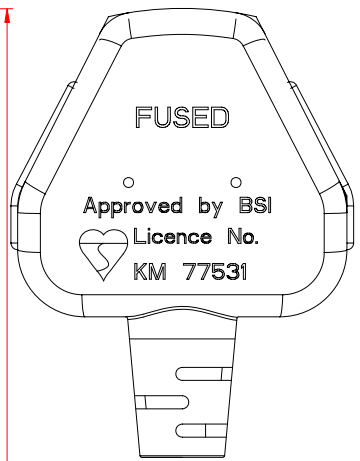

WHITE COVER

PLUG: MSL-403

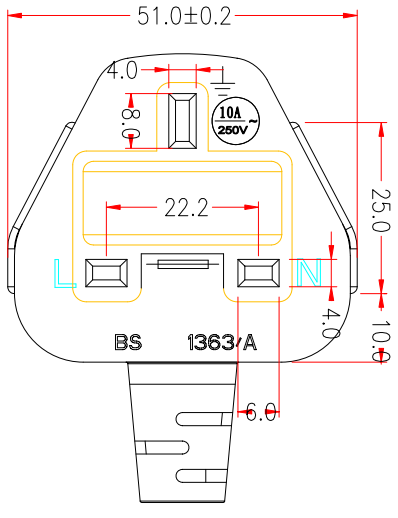

P1	P2
BROWN	L
BLUE	N
GREEN/YELLOW	E

PAGE: 1 OF 2


\* NOTE: All relevant materials are complied with RoHS directive .

REV.5 2017.11.22	MODIFY P1 PLUG		
REV.4 2017.11.08	MODIFY P2 PLUG MODEL SIZE FOR MODFY CONCANE LETTERING MARKING CABLE AND MODFY CABLE DRAWING NO:EPH5V011003C-103 FROM EPH5V011003C-034		
REV.2 2013.03.11	MODIFY CABLE MARKING CONTENT	REV.3 2015.02.03	ADD LENGTH
REV.1 2012.01.16	MODIFY FUSE		CHECKED

No.	DESCRIPTION	Q'ty	Supplier
3	H05WV-F 3G 1.00mm <sup>2</sup> G7SA-3, OD 7.1mm, JACKET BLACK, DRAWING No. EPH5V011003C-103	Xmm	M304
2	MOLDED PVC 45P, COLOR BLACK BRACKET: CP-R445A-BS TERMINAL: 2*4mm, 98744BS-0/A	1 3	M304 M257
1	MOLDED PVC 45P, COLOR BLACK FUSE LATCH: MSL-403 FUSE: 10A PRESSURE CAP, MSL-403 PLUG BRACKET AND TERMINAL A PIECE TYPE:168T03, MSL-403	1 1 1 1	M767 M304 M455 M402 M402


  

PART NO. 10740ZEF3J53F(PP082-05)	Revision:	Cable Length Unless Other Spec.
APPROVED	HU	0 ~200mm
CHECKED	JH	201~1000mm
DRAWING	JH	1001 ~1500mm
DATE	22/NOV/17	1501 ~2100mm
ITEM NO.	EK484.X	2100mm ↑





ITEM NO.	Length(L)	Length(X)	LABEL
EK484.2	2000±20mm	1980mm	EK484.2
EK484.5	5000±40mm	4980mm	

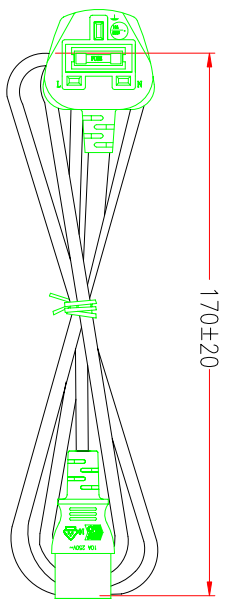

XXXXXX表示每次工單的P/O

\*THE LABEL TO BE STAMPED ON THE POLY-BAG

⚠ CONCAVE LETTERING WORD CABLE:

H05W-F 3G 1.0mm<sup>2</sup> Ⓣ Ⓝ Ⓝ Ⓝ KEMA-KEUR  
 <VDE> Ⓢ N20050 GISA-3 3G 1.0mm<sup>2</sup> MSL Ⓢ IEMTEU

PAGE: 2 OF 2

REV.5 2017.11.22	MODIFY P1 PLUG		
REV.4 2017.11.08	MODIFY P2 PLUG MODEL SIZE FOR, MODIFY CONCAVE LETTERING MARKING CABLE&MODIFY CABLE DRAWING, NO.EPH5011003C-103 FROM EPH5011003C-034		
REV.2 2013.03.11	MODIFY CABLE MARKING CONTENT	REV.3 2015.02.03	ADD LENGTH
REV.1 2012.01.16	MODIFY FUSE		CHECKED

\* NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
PART NO. 10740ZEF3F53F(FP082-05)	Revision:		
APPROVED			Cable Length Unless Other Spec. Tolerances:
CHECKED HU			0 ~200mm ±10mm
DRAWING JIANGJU			201~1000mm ±20mm
DATE 22/NOV/17	ITEM NO. EK484.X		1001 ~1500mm ±25mm
			1501~2100mm ±30mm
			2100mm↑ ±40mm

